

DERC DP-Nozzle

DERC DP-Nozzle

Scan for
more info



DERC DP-NOZZLE

Connection	M/F	Length	Diameter	Max. Pressure	Part No.
1/16" NPT	Female	30 mm	Ø 10 mm	1000 bar	DP-116NF
1/8" NPT	Female	35 mm	Ø 12 mm	1500 bar	DP-18NF
1/4" NPT	Female	45 mm	Ø 16 mm	1000 bar	DP-14NF
M7x1	Female	27 mm	Ø 10 mm	?	DP-07F

FOR (RIGID) LANCES AND LANCING MACHINES UP TO 1500 BAR

The DERC Penetrator Type, point shape model (DP-nozzle) is designed for flex and rigid lances, with a maximum pressure of 1500 bar.

Innovative Design

The DP-nozzle is available in four different connections. The nozzle body is corrosion resistant, hardened and guarantees a long life cycle.

Stock Item

The DP-nozzle is a stock item with a short delivery time and an attractive price level.

Configured on Request


The nozzle will be optimally configured for your working conditions based on your requirements and specifications (such as pressure, pump capacity, use as pulling/pushing or neutral, connection, thread, permissible reaction force and spray pattern).

FEATURES

- Up to 1500 bar
- Configured on request
- Short delivery times

APPLICATION


- For (rigid) lances and lancing machines

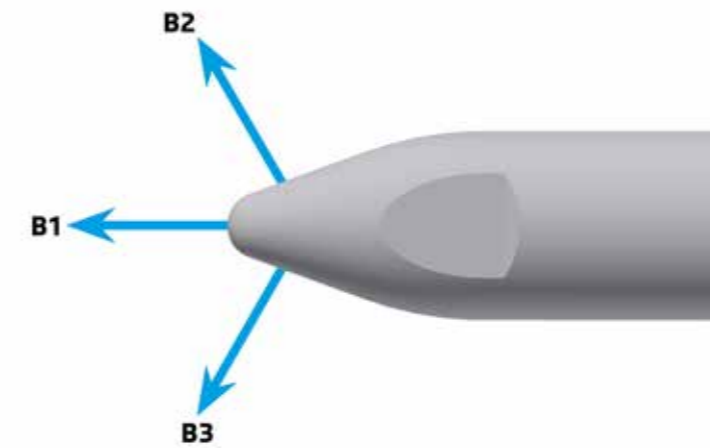

NOZZLE JET ANGLES*

B1	0,0°
B2	60,0°
B3	75,0°

*Applicable to: DP-07F & DP-18NF nozzle types

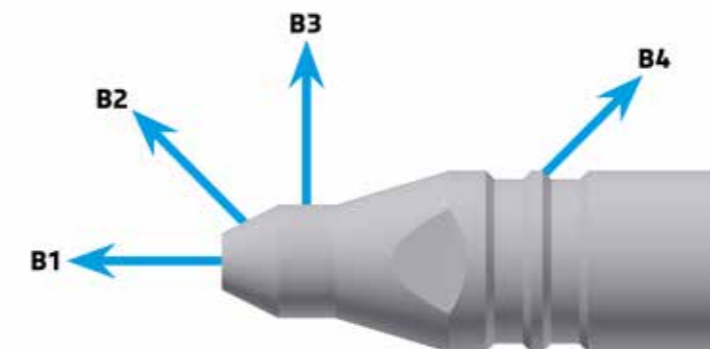

NOZZLE JET ANGLES*

B1	0,0°
B2	45,0°
B3	90,0°
B4	135,0°

*Applicable to: DP-116NF & DP-14NF nozzle types

CALL US +31 186 - 62 14 84