

DERC DPLT-Nozzle

DERC DPLT-Nozzle

Scan for
more info



DERC DPLT-NOZZLE

Connection	M/F	Length	Diameter	Max. Pressure	Part No.
1/4" - 28 UNF	Male	30 mm	Ø 8 mm	1000 bar	DPLT-14UM.xxx
5/16" - 24 UNF	Male	37 mm	Ø 10 mm	1500 bar	DPLT.xxx

FOR INTERNAL BUNDLE CLEANING MACHINES UP TO 1000 / 1500 BAR

The DERC Power Lance type (DPLT-nozzle) is designed for cleaning with internal bundle cleaning machines up to a maximum pressure of 1000 / 1500 bar.

Innovative Design

The DPLT-nozzle is available in two versions:

- Ø 10 mm with male thread of 5/16" UNF
- Ø 8 mm with male thread of 1/4" UNF

The nozzle body is corrosion resistant, hardened and guarantees a long life cycle.

Stock Item

The DPLT-nozzle is a stock item with a short delivery time and an attractive price level.

Configured on Request

The nozzle will be optimally configured for your working conditions based on your requirements and specifications (such as pressure, pump capacity, use as pulling/pushing or neutral, connection, thread, permissible reaction force and spray pattern).

FEATURES

- Up to 1000 / 1500 bar
- Configured on request
- Short delivery times


APPLICATION

- For internal bundle cleaning machines

NOZZLE JET ANGLES*

B1	0,0°
B2	15,0°
B3	30,0°
B4	45,0°
B5	60,0°
B6	90,0°
B7	100,0°
B8	135,0°

**Applicable to: DPLT-14UM nozzle type*

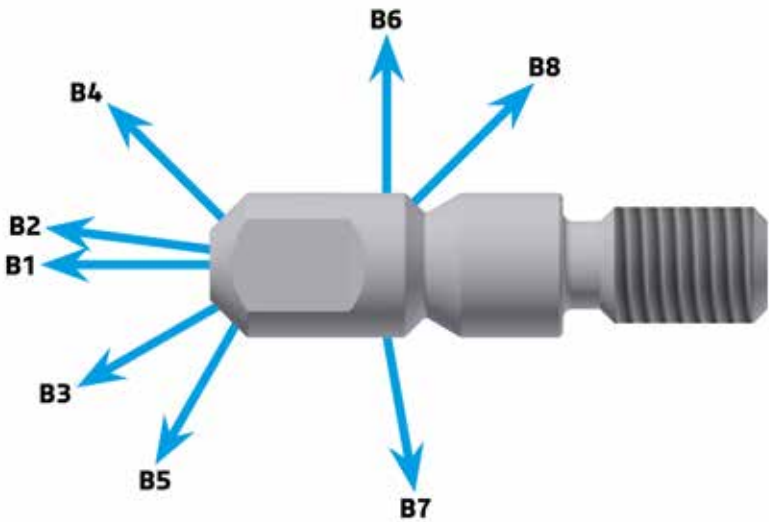

NOZZLE JET ANGLES*

B1	0,0°
B2	7,5°
B3	30,0°
B4	45,0°
B5	60,0°
B6	90,0°
B7	90,0°
B8	135,0°

**Applicable to: DPLT nozzle type*

