

## Water Jetting Equipment

FOR INDUSTRIAL CLEANING & SURFACE PREPARATION

## **COMING SOON IN 2024!**

- **SPC-S UH** THE SMALLEST SPEED REGULATED PIPE CLEANER UP TO 3000 BAR
- **RUNNER UH SERIES** 13MM TUBE SPINNER UP TO 3000 BAR
- **PATENTED SPEED CONTROL SYSTEM** ON RUNNER SERIES TO REMOVE THE HARDEST SCALE AND PLUGS






SPC-S UH 3000 BAR RUNNER UH 3000 BAR





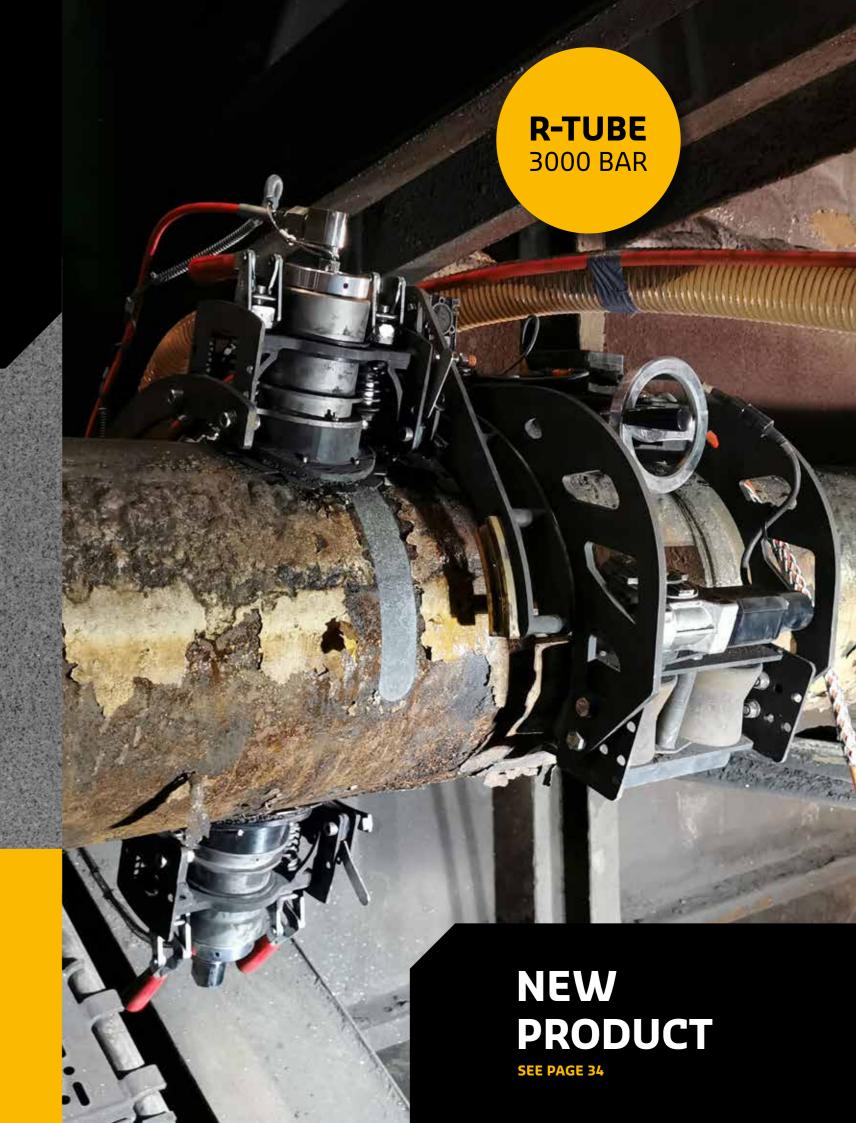



#### **Table of Contents**

	Water Jetting Equipment for Industrial Cleaning & Surface Preparation Combined Forces Our Partners Products	6 8 10 12
	Tube Bundle Cleaning	14
	DERC Runner Nozzle	14
	DERC Rotating Nozzle Spin-Jet	18
	DERC Nozzles	20
	DERC Shell Side Blaster SSB	22
	DERC Tube Bundle Rollers DERC Rotating Coupling Swivel RCS-200	24 26
	DERC Rigid Lance Cleaner RLC	28
	DERC Blast Container	32
	Pipe Cleaning	34
NEW	DERC R-Tube	34
	DERC Rotating Pipe Cleaner RPC	36
	DERC Speed Regulated Line Cleaner SLC	38
	DERC RotoCar Cleaning System	42
	DERC Speed Regulated Pipe Cleaner SPC	44
	DERC Speed Regulated Pipe Cleaner SPC-UH DERC Centralizers	48 50
	Swivels	52
	DERC Rotary Coupling Swivel RCS UHS	52
	DERC Rotary Coupling Swivel RCS UHS Mini	54
	DERC Rotary Coupling Swivel RCS Mini	56
	DERC Rotary Coupling Swivel RCS-44	58
	DERC Rotary Coupling Swivel RCS-75	60
	Tank Cleaning	62
	DERC Mini Turret	62
	DERC Tank Cleaning Tools	64
	Abrasive Cutting	66
NEW	DERC Abrasive Cutting System	66
	Surface Cleaning	72
	DERC MagTrack	72
	DERC Hydro-Jet Mower	76
	DERC Rotary Coupling Swivel RCS-500	78
	RD Masterjet	80
	Monro-Jet Nozzles	81

#### **Table of Contents**

Automated Solutions	82
DERC Hydraulic Hose Reel	82
DERC Air PreHeater Cleaner APC	84
DERC Air PreHeater Cleaner XXL APC-XXL	86
Hoses	88
DERC Hydroblast 4+ Hose	8
SPIR STAR Hoses	8
Safety Products	90
DERC Hose Catchers	9
DERC Hose Safety Systems	9
DERC Warning Sign Water Jetting	9
Guns & Foot Valves	98
Guns & Foot Valves	98
Nozzles	10-
Nozzles	10
DERC Nozzle Holder for Paper Mill Applications	11
Paper-Jet Nozzles	11.
Accessories	110
DERC Adapters, Manifolds & Nozzle Holders	11
DERC Rupture Disc Holder	12
Rupture Disc	12
DERC Lances DERC Stingers	12 12
DERC Short 90° Elbows	12
Quick Connectors	12
DERC Long Radius Elbows	12
Connectors & Cables	13
Emergency Stops, Remotes & Reels	13
DERC Pre-Filter	13
	133
Sewer Cleaning	
Sewer Cleaning Sewer Cleaning Nozzles DERC Sewer Razor	13 13

#### Imprint

#### Publisher:

DERC Salotech Jan van der Heijdenstraat 44 3261 LE Oud-Beijerland

All rights reserved, reproduction in part or in whole is only permitted with the publisher's consent. Errors and omissions excepted. Illustrations and photos may differ. No liability for misprints is accepted.


5



#### **WATER JETTING TOOLS**

Whatever your needs for industrial cleaning or surface preparation are, DERC Salotech offers the right high pressure water jetting tools for the job. Our products are considered to be industry leading in innovation, quality and durability.

We offer everything from hand-held waterjet guns to fully automated solutions for cleaning tubes, pipes, surfaces, (oil) storage tanks and sewers. Thoroughly tested and certified to ensure safe and effective operation.

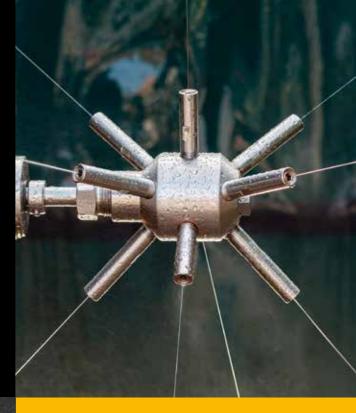

# Water Jetting Equipment for Industrial Cleaning & Surface Preparation



# MADERY

#### **DEDICATED SINCE 1985**

DERC Salotech offers total solutions, systems and all necessary accessories for high pressure water jetting. With 39 years of dedication to the high pressure water jetting technology for industrial cleaning and surface preparation, we are a quality partner for professionals all over the world.

DERC Salotech services thousands of customers and organizations in more than 40 countries. As an original water jetting equipment manufacturer we continuously design, develop and produce new products and innovations that will make your job easier, safer and more effective.



#### **CUSTOM MADE SOLUTIONS**

If it doesn't exist, DERC Salotech will invent it for you! Does your industrial cleaning objective requires a custom solution? Our engineers are committed to find the most suitable solution for your challenge. High pressure water jetting and innovation is part of our DNA.

Our engineers are ready to assist you, no matter how big or small the technical, process or safety challenges are. During the research, design and manufacturing we will focus on the most effective and (when appropriate) most innovative and safe cleaning solutions for your specific needs.





#### **DERC SALOTECH**

DERC Salotech operates as our front office internationally and operates from two locations in the Netherlands (Oud-Beijerland) and Germany (Seevetal). Our unique Made by DERC products are manufactured at our headquarters in the Netherlands.

DERC Salotech is recognised worldwide as an innovative and leading partner in the high pressure water jetting industry. No matter what your request is in the field of high pressure water jetting and industrial cleaning: your needs and interests are our mission. Our skilled staff and experts are completely committed to this mission; wherever you are and whatever your challenge or budget is.



### **Combined Forces**

DERC Salotech and DERC Adviesgroep are both subsidiaries of DERC Waterjetting. Combining forces, there is strong focus on promoting the water jetting technology, how to use it safely and servicing our customers.









#### DERC ADVIESGROEP

DERC Adviesgroep offers you a complete range of SIR and WJA courses in the field of water jetting and industrial cleaning.

Within our independent knowledge center located in the Netherlands (Stellendam), safety has been central for 20 years. Our mission and goal is to promote knowledge and increase safety within our field.



#### **TST SWEDEN**

Offering a complete assortment of personnel protection equipment of the highest standard for hydro demolition, water jetting and blasting at (ultra) high pressures. Their clothes are developed to offer the best possible comfort, while at the same time protecting operators from the impact of water jets up to 3000 bar.









### **Our Partners**

Together with our trusted partners we offer a complete range of water jetting products, accessories and solutions





SPIR STAR AUTHORIZED **DEALER & ASSEMBLY CENTER** 



#### **PEINEMANN**

Offering state-of-the-art semi-automated bundle cleaning systems in order to clean heat exchangers in the safest and most effective way possible.





#### **SPIR STAR**

The German leading specialist in the production of high-pressure hoses with a spiralized support made of high-tensile steel wires for use in a pressure range of 400 to 4000 bar.



## **DERC** Products







## **DERC** Runner Nozzle



#### PERFECT 360° CLEANING OF HEAT EXCHANGERS

The DERC Runner Nozzle is a rotating tube cleaning nozzle, designed for cleaning heat exchanger tubes. It has a maximum working pressure of 1500 bar/ 22K PSI.

#### **Four Sizes**

The Runner Nozzle comes in 4 available sizes: Ø 10 mm, Ø 13 mm, Ø 18 mm and Ø 24 mm.

#### **Three Types of Nozzle Heads**

The Runner Nozzle is available with standard, unplugger and polisher nozzle heads to remove hard plugs or scales.



#### **FEATURES**

- High efficiency jets, recessed drilled
- Uniquely shaped nozzle head for improved cleaning & unplugging
- Standard, polisher or unplugger nozzle head
- Patented design
- Hardened body
- Metric wrench flats
- Hardened inlet cover to improve mechanical wear and tear
- Various connections

#### **APPLICATION**

- Cleaning heat exchanger tubes
- Cleaning evaporator tubes
- Cleaning tubes and pipes

#### **DERC** Runner Nozzle



15

RUNNER 10 - DIAMETER Ø 10 MM - LENGTH 60 MM				
Max. Pressure	Part No.			
1500 bar / 22K	RUN10-M7F-3			
1500 bar / 22K	RUN10-516M-3			
1000 bar / 15K	RUN10-116NF-3			
1500 bar / 22K	RUN10-M4LF-3			
1500 bar / 22K	RUN10-M4RF-3			
	Max. Pressure  1500 bar / 22K  1500 bar / 22K  1000 bar / 15K  1500 bar / 22K			

#### **RUNNER 13 - DIAMETER Ø 13 MM - LENGTH 75 MM**

Connection	Max. Pressure	Part No.
1/8" BSP - Female	1500 bar / 22K	RUN13-18F-3
1/8" NPT - Female	1000 bar / 15K	RUN13-18NF-3
3/8" UNF LH - Female	1500 bar / 22K	RUN13-M6LF-3
3/8" UNF RH - Female	1500 bar / 22K	RUN13-M6RF-3

#### **RUNNER 18 - DIAMETER Ø 18 MM - LENGTH 101 MM**

Connection	Max. Pressure	Part No.
1/4" BSP - Female	1500 bar / 22K	RUN18-14F-2
1/4" NPT - Female	1000 bar / 15K	RUN18-14NF-2
9/16" UNF LH - Female	1500 bar / 22K	RUN18-M9LF-2
9/16" UNF RH - Female	1500 bar / 22K	RUN18-M9RF-2

#### **RUNNER 24 - DIAMETER Ø 24 MM - LENGTH 134 MM**

Connection	Max. Pressure	Part No.	
3/8" BSP - Female	1500 bar / 22K	RUN24-38F	
3/8" NPT - Female	1000 bar / 15K	RUN24-38NF	
9/16" UNF LH - Female	1500 bar / 22K	RUN24-M9LF	
9/16" UNF RH - Female	1500 bar / 22K	RUN24-M9RF	



#### **DERC** Runner Nozzle

#### **DERC** Runner Nozzle



17

RUNNER 10			
Part No.	Туре	Max. Pressure	Flow
RUN10-025B-S1	Standard	1000-1500 bar / 15-22K	24-30 lpm / 6.5-8 gpm
RUN10-025B-U1	Unplugger	700-1000 bar / 10-15K	19-23 lpm / 5-6 gpm
RUN10-025B-U2	Unplugger	1000-1500 bar / 15-22K	21-25 lpm / 5.5-6.5 gpm
RUN10-025B-P1	Polisher	700-1000 bar / 10-15K	17-21 lpm / 4.5-5.5 gpm
RUN10-025B-P2	Polisher	1000-1500 bar / 15-22K	19-23 lpm / 5-6 gpm

#### **RUNNER 13**

KONNEK 13			
Part No.	Туре	Max. Pressure	Flow
RUN13-025B-S1	Standard	700-1000 bar / 10-15K	30-38 lpm / 8-10 gpm
RUN13-025B-S3	Standard	1000-1500 bar / 15-22K	30-38 lpm / 8-10 gpm
RUN13-025B-U1	Unplugger	700-1000 bar / 10-15K	27-34 lpm / 7-9 gpm
RUN13-025B-U3	Unplugger	1000-1500 bar / 15-22K	27-34 lpm / 7-9 gpm
RUN13-025B-P1	Polisher	700-1000 bar / 10-15K	27-34 lpm / 7-9 gpm
RUN13-025B-P3	Polisher	1000-1500 bar / 15-22K	27-34 lpm / 7-9 gpm





16



**UNPLUGGER HEAD** 



**POLISHER HEAD** 

	RUNNER 18			
	Part No.	Туре	Max. Pressure	Flow
2000	RUN18-025B-S1	Standard	700-1000 bar / 10-15K	42-53 lpm / 11-14 gpm
	RUN18-025B-S2	Standard	700-1000 bar / 10-15K	30-38 lpm / 8-10 gpm
	RUN18-025B-S3	Standard	1000-1500 bar / 15-22K	42-53 lpm / 11-14 gpm
	RUN18-025B-U1	Unplugger	700-1000 bar / 10-15K	42-53 lpm / 11-14 gpm
	RUN18-025B-U2	Unplugger	700-1000 bar / 10-15K	30-38 lpm / 8-10 gpm
	RUN18-025B-U3	Unplugger	1000-1500 bar / 15-22K	42-53 lpm / 11-14 gpm
	RUN18-025B-U4	Unplugger	1000-1500 bar / 15-22K	30-38 lpm / 8-10 gpm
	RUN18-025B-P1	Polisher	700-1000 bar / 10-15K	42-53 lpm / 11-14 gpm
	RUN18-025B-P2	Polisher	700-1000 bar / 10-15K	30-38 lpm / 8-10 gpm
	RUN18-025B-P3	Polisher	1000-1500 bar / 15-22K	42-53 lpm / 11-14 gpm
	RUN18-025B-P4	Polisher	1000-1500 bar / 15-22K	30-38 lpm / 8-10 gpm

#### **RUNNER 24**

Part No.	Туре	Max. Pressure	Flow
RUN24-025B-P1	Polisher	700-1000 bar / 10-15K	76-95 lpm / 20-25 gpm
RUN24-025B-P2	Polisher	700-1000 bar / 10-15K	57-72 lpm / 15-19 gpm
RUN24-025B-P3	Polisher	700-1000 bar / 10-15K	45-53 lpm / 12-14 gpm
RUN24-025B-P4	Polisher	1000-1500 bar / 15-22K	68-80 lpm / 18-21 gpm
RUN24-025B-P5	Polisher	1000-1500 bar / 15-22K	57-64 lpm / 15-17 gpm
RUN24-025B-P6	Polisher	1000-1500 bar / 15-22K	45-53 lpm / 12-14 gpm
RUN24-025B-S1	Standard	700-1000 bar / 10-15K	76-95 lpm / 20-25 gpm
RUN24-025B-S2	Standard	700-1000 bar / 10-15K	57-72 lpm / 15-19 gpm
RUN24-025B-S3	Standard	700-1000 bar / 10-15K	45-53 lpm / 12-14 gpm
RUN24-025B-S4	Standard	1000-1500 bar / 15-22K	68-80 lpm / 18-21 gpm
RUN24-025B-S5	Standard	1000-1500 bar / 15-22K	57-64 lpm / 15-17 gpm
RUN24-025B-S6	Standard	1000-1500 bar / 15-22K	45-53 lpm / 12-14 gpm



DERC Rotating Nozzle
Spin-Jet




#### CLEANING HEAT EXCHANGER TUBES UP TO 1500 BAR

The DERC Spin-Jet nozzles are designed for cleaning heat exchanger tubes and pipe lines with high pressure water jetting technology.

The water flow and pressure of your high pressure pump rotates the DERC Spin-Jets. DERC Salotech manufactures a complete range of rotating Spin-Jet tube cleaning nozzles, which consists of 5 different models.

All spinnes are marked with Spin-Jet.com, so you can see that it is an original DERC Salotech product.



#### **FEATURES**

- Up to 1000/1500 bar
- Metric, BSP, NPT, MP RH or LH connections
- Perfect cleaning without "stripes"

#### **APPLICATIONS**

- General pipe and tube cleaning
- Heat exchanger cleaning

#### **DERC** Rotating Nozzle Spin-Jet



SPIN-JET SIBR				
Jet Angle	Diameter	Connection	Max. Pressure	
2 x 90° Radial, 2 x 45° and optional front jet	6, 8, 10, 18, 28 and 40 mm	Metric, BSP, NPT, MP RH or LH	1500 bar	

#### SPIN-JET SI

Jet Angle	Diameter	Connection	Max. Pressure
4x 90° Radial and optional front jet	6, 8, 10, 12, 18, 28 and 40 mm	Metric, BSP, NPT, MP RH or LH	1500 bar

#### **SPIN-JET SISFBR**


Jet Angle	Diameter	Connection	Max. Pressure
2 x 10° Front 2 x 90° / 2 x 45°	10, 12, 18, 28 and 40 mm	Metric, BSP, NPT, MP RH or LH	1500 bar

#### SPIN-JET FR


Jet Angle	Diameter	Connection	Max. Pressure
2 x Cross Jet Front 2 x 90° Radial	10, 12, 22, 31 and 46 mm	Metric, BSP, NPT, MP RH or LH	1000 bar


#### SPIN-JET R

Jet Angle	Diameter	Connection	Max. Pressure
2x 90° Radial	10, 12, 22, 31 and 46 mm	Metric, BSP, NPT, MP RH	1000 bar









CALL US +31 186 - 62 14 84



### **DERC** Nozzles





### THE PERFECT NOZZLE FOR ANY JOB - CONFIGURED TO YOUR SPECIFICATIONS

The DERC nozzle range is the basis for all your water jetting projects up to 3000 bar. Our basic models simplify your choice; they can be configured to your specifications and delivered quickly. We will optimally configure and drill your nozzle per order, to suit your working conditions.

#### **Perfect Spray Patterns**

Based on your requirements and specifications (such as pressure, pump capacity, use as pulling / pushing or neutral, permissible reaction force and spray pattern) we advise you on the optimal configuration. Providing you with the perfect spray pattern for the best results.



**DST** 

#### **FEATURES**

- Configured to your specifications
- High efficiency with optimum spray pattern
- Longer life cycle because of recessed drilled nozzle-holes and spray pattern
- No oxidation, due to applied materials and heat treatment
- Short delivery times
- Excellent value for money

#### **APPLICATION**

• High pressure cleaning of tubes and pipes

#### **DERC** Nozzles



21



Part No.	Connection	Max. Pressure
DUT-Nozzle	M7x1 F   1/8" BSP F   1/4" BSP F   3/8" BSP F	1500 bar
DST-Nozzle	M7x1 F   1/8" BSP F   1/4" BSP F	1500 bar
DPT-Nozzle	M7x1 F   1/8" BSP F   1/4" BSP F	1500 bar
DPLT-Nozzle	1/4" - 28 UNF M   5/16" - 24 UNF M	1500 bar
DUHP-Nozzle	12-28UN M   10-28UN M	2500 bar
DUHP-Nozzle	M7x1 RH M   M10x1 RH M	3000 bar
DTLT-Nozzle	1/4" UNF LH F   3/8" - 24 UNF LH F   9/16" - 18 UNF LH F   M14x1.5 LH F	3000 bar
DCN-Nozzle	M7x1 F   1/8" BSP F   1/4" BSP F	1500 bar
DCN-Nozzle	9/16" UNF LH F   M14x1.5 LH F   3/8" UNF LH F	3000 bar
DTLX-Nozzle	1/4" UNF LH F   3/8" UNF LH F   9/16" UNF LH F	1500 bar
DP-Nozzle	1/16" NPT F   1/8" NPT F   1/4" NPT F	1000 bar
18XX Series Nozzle	1/2" BSP M/F   M18x1.5 M   M22x1.5 M   M24x1.5 M	1500 bar





## **DERC** Shell Side Blaster **SSB**

#### **DERC** Shell Side Baster **SSB**

AUTOMATED SOLUTIONS TRACTOR + RCS-200



23

**ENERGY CHAIN** 



AUTOMATED SOLUTION FOR EXTERNAL CLEANING OF HEAT EXCHANGER TUBES

The DERC SSB is an automated solution for external cleaning of heat exchangers with high pressure water jets.

#### **Safety First**

The DERC SSB makes shell side cleaning simple and safe by placing the operator at a safe distance.

#### **Innovative Design**

The DERC SSB consists of two wheeled frames, which can be placed over the heat exchanger, and adjusted in height by means of two manually operated hand wheels. The system comes with two tensioner chains to secure the frames to your tube bundle rollers. The DERC SSB is easy to disassemble in smaller/shorter pieces for easy transportation.

#### **Control Panel**

- Speed + Movement tractor left right
- Speed + Movement bundle rotation
- Speed rotation nozzles
- Air Hoses and Air Preparation Oiler / Filter included

#### **FEATURES**

- Air or hydraulic powered
- A-Frames with manual height adjustment
- Chains with tensioner to fix A-Frame to bundle rollers
- DERC Automatic Solutions Rail 4" with gear rack
- DERC RCS-200 swivel
- Control Panel

#### **APPLICATIONS**

- General pipe and tube cleaning
- Shell side (heat exchanger) cleaning

Automated Solutions Tractor
Mounted between the frames is a
stainless steel coupled profile with
a 4" Automated Solutions Rail attached. The DERC Automated Solutions
Tractor (AST) runs on the Automated
Solutions Rail. The DERC AST moves
back and forth over the DERC Automated Solutions Rail (ASR) automatically.
This is realized by means of a gearbox,
air or hydraulic engine, gear and heavy
duty stainless steel roller bearings. End
switches coupled to a control valve ensure the automatic movement back and
forth. The stroke can be easily adjusted

by moving the end stops.

#### **SPECIFICATIONS**

Total Length	8m / 12 m (other lengths possible)
Max. Tube Bundle Length	7,5 m / 10 m (other lengths possible)
Height Adjustment Frame	1650 - 2600 mm rails
Max. Pressure	1500 bar / 22K
Max. Flow	1000 bar @ 380 lpm / 1500 bar @ 240 lpm
Inlet Connection	M36x2 male / M24x1,5 / 3/4" NPT
Movement Speeds	2 -12 m/min (7 - 40 ft/min)
RCS-200 Rotation Speed	+/- 500 rpm
Nozzle Inserts	2x Type 4 or 2 x Type 226 or 2 x 1/4" NPT




## **DERC** Tube Bundle Rollers

## DERC Tube Bundle Rollers



25

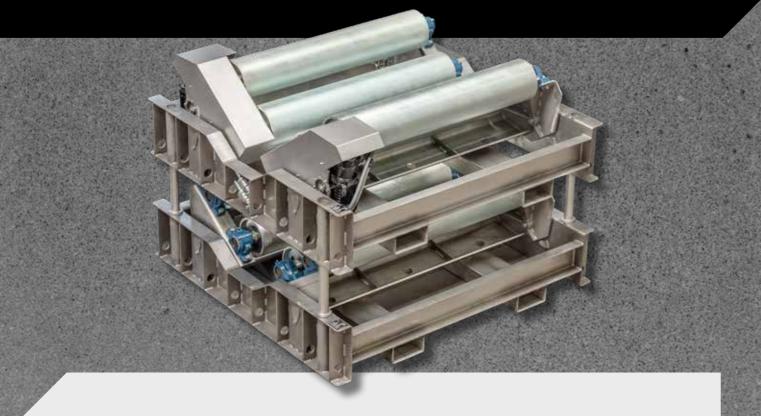

#### SAFE ROTATION OF PIPE BUNDLES DURING CLEANING

The DERC Tube Bundle Rollers are heavy duty rollers for any bundle up to 25,000 kg. These rollers rotate pipe bundles during cleaning.

#### **Set of Bundle Rollers**

The DERC Tube Bundle Rollers are sold in sets of two. Each Bundle Roller contains four rollers for optimal bundle support. One Bundle Roller features driven rollers, while the other Bundle Roller operates without drive. The drive engine can be powered either pneumatically or hydraulically. The set can be stacked for easy transport or storage.

#### Design

- Stainless steel base frame
- Heavy duty bearings
- Gearbox Motor
- Chain tensioner
- Chain guard
- 4 steel zinc plated rollers

#### **FEATURES**

- Suitable for a large range of bundle sizes, without adjusting the rollers
- Air or hydraulic driven
- Forklift pockets for easy transport
- Stackable for efficient storage

#### **APPLICATION**

• Safe rotation of pipe bundes



Max. Load	25,000 kg
Power	Air or hydraulic
Bearing	8 Heavy duty, grease filled bearings per set
Application	Tube bundle minimum diameter 450 mm up to 2000 mm
Weight	Ca. 1000 kg per set (550 + 475)
Dimensions (L x W x H)	1500 x 1500 x 650 mm
Control Panel	Optional





## DERC Rotary Coupling Swivel RCS-200

#### **DERC** Rotary Coupling Swivel RCS-200







#### POWERED ROTATING COUPLING ASSEMBLY

The RCS-200 is an air or hydraulic powered rotating coupling assembly (swivel) with a maximum working pressure of 1500 bar.

#### **Optional Arms and Heads**

The RCS-200 is designed as a surface cleaning device and is the tool for outside tube bundle cleaning. The Powered Rotary Coupling is speed adjustable and available with different nozzle heads and nozzle options.

The RCS-200 series comes standard with a stainless steel guard which protects the nozzle head and arms. The nozzle head and arms have a jet path of 215 mm and are available in 3 versions.

#### **Inlet Connections**

The RCS-200 series are standard delivered with the following inlet connections (straight / 90°):

- 3/4" NPT Female
- 3/4" MP Female
- M24 x 1.5 Female Flat

#### **FEATURES**

- Various rotations for high jet impact
- Bended nozzle arms with flow stabilizers to produce powerful and effective jets
- Various heads, and customization is possible for a larger range of applications
- Replaceable high quality nozzle tips with maximum jet quality

#### **APPLICATIONS**

- External tube bundle cleaning
- Surface cleaning systems and solutions, combined with our automated solution rails and tractors
- Cleaning of floors, conveyors and large surfaces
- Installation on many controlled moveable systems

#### **DERC RCS-200C-HS-A**

Max. Pressure	Drive	Rotation Speed	Max. Flow
1000 / 1500 bar	Air	+/- 500 rpm	380 / 240 lpm

#### **DERC RCS-200C-HS-H**

Max. Pressure	Drive	Rotation Speed	Max. Flow
1000 / 1500 bar	Hydraulic	+/- 400 rpm	380 / 240 lpm

#### **OPTIONAL ARMS AND HEADS**

Arm Type	Nozzle Type	Max. Pressure	
RCS-230B-M20-T4	Type 04 nozzles	1500 bar	Complete with flow stabilizers and nozzle caps
RCS-230B-M20-T226	Type 226 nozzles	1000 bar	Complete with flow stabilizers and nozzle caps
RCS-230B-14NF	DI 14 nozzles	1000 bar	With integrated flow inducer



## **DERC** Rigid Lance Cleaner RLC

#### **DERC** Rigid Lance Cleaner RLC





#### SAFE AND FAST CLEANING OF HEAT EXCHANGER TUBES

The DERC Rigid Lance Cleaning System is a modular rigid lancing system to clean heat exchanger tube bundles. It is perfect for safe and fast removal of hard plugs, scaling and general cleaning of heat exchangers. The RLC is easy to adapt to any length and suitable for a maximum working pressure of 3000 bar.

#### **Automated Solutions Rail**

The basis of the RLC system is an aluminum rail with gear rack on which a modular rotating lancing carriage drives the lances in and out the heat exchanger tubes.



#### **FEATURES**

- Control panel
- DERC Automatic Solutions Rail 4" with gear rack
- DERC Modular Lance Rotating Drive Unit
- 1, 2, 3 or 5 lances
- DERC X-Y Positioner
- Air powered (hydraulic on request)
- A-Frame for rear support (horizontal appl.)

#### **APPLICATION**

• Heat exchanger cleaning



For positioning the lances in front of the heat exchanger the RLC system comes with an X-Y Positioner. This X-Y Positioner can be used for horizontal or vertical applications of the RLC. For horizontal aplications it consists of a removable wheel kit, support stands / legs and scaffolding guides. For vertical applications the X-Y positioner is mounted to the tube bundle.

#### Rear Support / A-Frame

For stability the RLC is equipped with a rear support. For horizontal applications this is an A-Frame with a movable support chain. For vertical applications a custom solution is needed depending on the length of the aluminum rail.







#### DERC SALOTECH

#### **DERC** Rigid Lance Cleaner RLC

#### **DERC** Rigid Lance Cleaner RLC









#### **Control Panel**


For controlling all the functions of the RLC system the machine comes with a control panel, placing the operator out of the line of fire.

#### Power

The RLC system is standard fully air powered, however on request we can offer a hydraulic version of the system.



On the lance carriage you will find our Modular Lance Rotation Drive Unit. This modular block can be converted to rotate 1, 2, 3 or 5 high pressure lances in any pressure range.

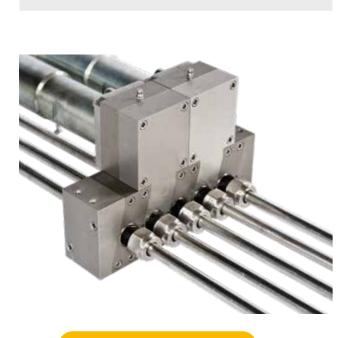







#### **Nozzles and Lances**

Based on your requirements, DERC Salotech offers a full range of nozzle and lance configurations for the RLC (see page 20 and 126).

CALL US +31 186 - 62 14 84

#### DERC SALOTECH

### **DERC** Blast Container

#### **DERC Blast Container**





### THE MOBILE SOLUTION FOR SAFE AND CLOSED TUBE BUNDLE CLEANING

The DERC Blast Container is a (semi) automatic solution for closed high pressure water jetting of tube bundles. It is suitable for tube bundles with a diameter of 450-1600 mm and a maximum length of 6000 mm.

#### **Mobile and Emission Free**

The Blast Container is a bundle blaster which is built into a container. This makes the bundle blaster easy to transport and possible to use on your desired location. Waste water and derbis is collected, so there is no pollution of the direct environement.

#### **Internal and External Cleaning**

The Blast Container is able to clean both the inside and the outside of the tube bundles or other parts. For internal cleaning there is an adapter plate to connect your flex lance machine.

#### **Bundle Rollers**

The DERC Blast Container comes with pneumatic driven tube bundle rollers with a maximum capacity of 25 ton.

#### **FEATURES**

- Mobile, easy to transport
- Full pneumatic or electric pneumatic controls
- Full pneumatic bundle rollers
- Emission free
- 4-jets manifold with high speed nozzles
- Other jet manifolds available
- Adapter plate for flex lance machine for internal cleaning

#### **APPLICATION**

• Closed external and internal cleaning of tube bundles



Tube Bundle Range	450-1400 mm
Max. Tube Bundle Length	6000 mm
Max. Pressure	1000 bar
Max. Flow	200 lpm
Manifold	4-jets with high speed nozzles
Nozzles	Type 04 or 226
Drive	Air powered
Bundle Rollers	Air powered max. 25 ton
Control	Air or electric pneumatic






#### DERC SALOTECH

## **DERC** R-Tube

#### **DERC** R-Tube



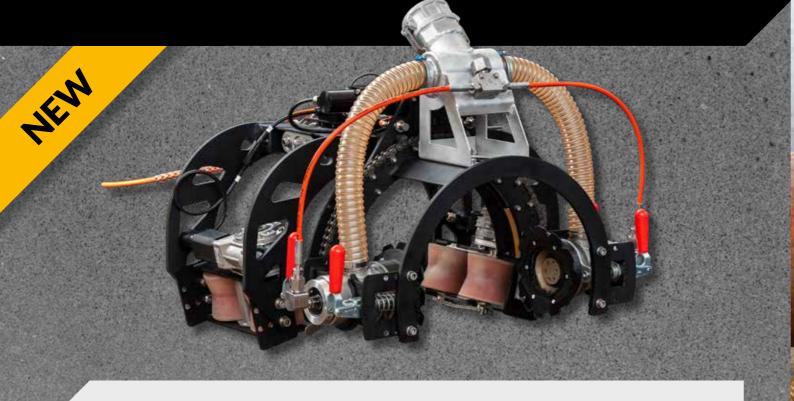



#### INNOVATIVE SOLUTION FOR CLEANING OUTSIDE OF PIPES

The R-Tube is an automated solution for efficient surface preparation and cleaning of the outside diameter of pipes. It consists of a carrier, which travels the length of the pipe. And a cleaning head equipped with 2 Masterjets with a custom-made suction manifold using a MagTrack inspired bellow to secure no leakage. The cleaning head rotates (180 degrees) around the pipe to ensure no surface is left untouched.

#### **Various Sizes**

This innovative cleaning tool comes in various sizes making it capable of cleaning diameters from 6" up to 32".

#### Flexible Operation and Easy Mounting

The R-Tube is designed as a (semi)open concept which means that both carrier and cleaning heads don't surround the entire pipe. This allows the machine to move past obstacles such as pipe supports, crane lugs and possibly branching pipes. The design is created to be mounted without any need of tools.

#### **FEATURES**

- Compact design
- Easy mounting
- Adjustable to different diameters (6" up to 32", other sizes possible on request)
- Up to 3000 bar @ 18 l/min
- Open construction
- MagTrack remote controls
- Travel speed: 0 3 m/min

#### **APPLICATIONS**

• Automated surface preparation and cleaning of the outside diameters of pipes









## DERC Rotating Pipe Cleaner RPC

#### **DERC** Rotating Pipe Cleaner RPC







The DERC Salotech Pipe Cleaner is the tool for cleaning (drill) pipes with all kind of deposits. Hard cement, drill mud or even NORM cleaning is possible with this tool.

The DERC RPC has a rugged modular design, and is easy to built up and disassemble for transport. The jack stands are height adjustable and come with wheels and jacks.



#### **FEATURES**

- Rugged modular design
- Available in various pressure ranges up to 3000 Bar (43K)
- Rotation speed/feed independent adjustable
- Configurable in length
- Unique UHP lance construction with support casing
- Rugged Guide blocks with 4 roller bearings
- Configurable centralizers and nozzle carriers

#### **APPLICATIONS**

- Cleaning (drill) pipes
- Remove hard cement, drill mud
- NORM cleaning







## **DERC** Speed Regulated Line Cleaner SLC



#### VERSATILE MODULAR PIPE CLEANING TOOL

The rotation speed of this modular pipe cleaning tool can easily be adjusted "manually" for the required cleaning job. Slow speeds for plugged pipes with hard residues, and fast speeds for polishing the inner walls of the pipes.

#### **Cleaning Heads**

To suit the requirements of every cleaning job the SLC has a variety of head choices available to which you can connect a pulling ring, customized ports and have multiple jetting options. The SLC heads are based on pressure, flow and type of cleaning work.

#### **Extension Lances**

Certain head options require extension nipples. See our extension lances for the possibilities.

#### **FEATURES**

- Up to 1500 bar
- Manual speed adjustment
- Choose the right SLC head for the job
- Optional pulling ring
- Optional extension lances
- Rugged stainless steel construction

#### **APPLICATIONS**

- Cleaning plugged pipes with hard residues
- Polishing inner walls of pipes

#### **DERC** Speed Regulated Line Cleaner **SLC**







#### **SLC OPTIONS**

	SLC-1000	SLC-1500
Inlet Connection	3/4"NPT F	M24 x 1.5 Flat F 3/4" or 14 NPS F (3/4 MP)
<b>Shaft Connection</b>	3/4"NPT M	M24 x 1.5 Flat M
Max. Pressure	1000 bar	1500 bar
Diameter	75 mm	75 mm
Length	155 mm	175 mm
Max. Flow	380 lpm	380 lpm
Part No.	SLC-1000-34NF.34NM	SLC-1500-24FV.24MR, SLC-1500-M12F.24MR

#### Accessories

The DERC Salotech centralizers allow the SLC to work seamlessly with our high pressure extension arms, placing the effective water jets closer to the wall of the pipe. In addition the jetting configurations can easily be optimized with our high quality DERC Salotech inserts, to provide either more pulling power or more unplugging power.



41

#### **DERC** Speed Regulated Line Cleaner **SLC**

#### **DERC** Speed Regulated Line Cleaner **SLC**





SLC HEAD OPTIONS						
	SLC-56-12NF	SLC-56-14NF	SLC-57-14NF	SLC-66-14NF	SLC-66-34UF	SLC-67-14NF
Off Set	3, 5, 9, 15	3, 5, 9, 15	3, 5, 9, 15	3, 5, 9, 12, 15	5, 9, 12, 15	3, 5, 9, 15
Max. Pressure	1000 bar	1000 bar	1000 bar	1500 bar	1500 bar	1500 bar
Connection	6x 1/2" NPT	6x 1/4" NPT	7x 1/4" NPT	6x 1/4" NPT	6x 3/4" UNF	7x 1/4" NPT
Jet Angle	2x 45°, 2x 90° 2x 135°	2x 45°, 2x 90° 2x 135°	1x 15°, 2x 45° 2x 90°, 2x 135°	2x 45°, 2x 90° 2x 135°	2x 45°, 2x 90° 2x 135°	2x 15°, 2x 45° 2x 90°, 2x 135°
Extension Lance	SLC-56-EXT- xxx	-	-	-	SLC-66-EXT- xxx	-
Pulling Ring	SLC-90	SLC-90	-	SLC-90	SLC-90	-







SLC EXTENSION LANCES		
SLC-1000	TOTAL WIDTH 90 GR	TOTAL WIDTH 45 GR
SLC-56-EXT-050	190	146
SLC-56-EXT-075	240	181
SLC-56-EXT-100	290	217
SLC-56-EXT-150	390	287
SLC-56-EXT-200	490	358
SLC-56-EXT-250	590	428
SLC-56-EXT-300	690	499
SLC-56-EXT-350	790	569
SLC-56-EXT-400	890	640
SLC-1500	TOTAL WIDTH 90 GR	TOTAL WIDTH 45 GR
SLC-66-EXT-050	182	140
SLC-66-EXT-075	232	175
SLC-66-EXT-100	282	210
SLC-66-EXT-150	382	281
SLC-66-EXT-200	482	351
SLC-66-EXT-250	582	422
SLC-66-EXT-300	682	492
SLC-66-EXT-350	782	563



## **DERC** RotoCar Cleaning System

#### **DERC** RotoCar Cleaning System







### CLEANING COMPLEX, BENDED AND LONG PIPE LINES WITH HIGH OPERATOR SAFETY

The DERC RotoCar Cleaning System is developed to remove difficult scales and incrustations on the inside of tubes or pipelines in a very fast and highly efficient way, with extremely high safety standards for the operator. We offer a 1500 and 3000 bar version.

#### **How Does It Work?**

The DERC RotoCar unit rotates a rubber high pressure hose. The rotation is done by an air motor. The "feed mechanism" will feed or pull the hose automatically in or out of the tube. The speed of the high pressure hose is manually adjustable for optimal cleaning results with different applications.

#### Rotate, Push & Pull

The RotoCar rotates a high pressure hose by means of a swivel, gearbox and air engine. The rotating hose runs through the feeder unit which pushes or pulls the high pressure hose in or out of the tube. The RotoCar is equipped with a slip coupling which ensures that the high pressure hose can only rotate while it is on pressure.

#### **FEATURES**

- 1500 or 3000 bar version
- Fast and highly efficient cleaning of pipes
- High operator safety
- Automatic feed and pull of hose
- Speed of hose feed and pull adjustable

#### **APPLICATIONS**

- Cleaning inside of tubes or pipelines
- Cleaning the most complex, bended and longest pipe line constructions
- Also suitable for large diameter pipes
- Remove difficult scales and incrustations

Max. Pressure	1500 or 3000 bar	
Max. Flow	380 lpm (1500 bar) or 140 lpm (3000 bar)	
Hose Connection 1500 bar	M24 x 1.5 DKOS male, M36 x 2 DKOS male (inlet and outlet)	
Hose Connection 3000 bar	9/16" HP	
Rotating Speed	Adjustable from 20 till 300 rpm	
Length Protecting Hose	3 m (10 ft)	
Weight	Approximate 65 kg	

**SPECIFICATIONS** 



#### **Adjustable Speed**

The speed of the high pressure hose is manually adjustable for optimal cleaning result with different applications. To insert the hose in the middle of the tube an adjustable clamping device is mounted on the front of the tube or pipe. To prevent damage to the rotating hose, there is a 2" or 3" stainless steel flexible tube mounted between the clamp device and the feed mechanism.

#### **RotoCar Nozzles**

The rotating hose in combination with our special nozzle range ensures a perfect cleaning effect and is suitable for cleaning the most complex, bended and longest pipe line constructions. We offer RotoCar nozzles for the 1500 and 3000 bar versions (see page 104).

43

CALL US +31 186 - 62 14 84



DERC Speed Regulated Pipe Cleaner SPC



#### CLEANING INDUSTRIAL PIPES WITH MULTIPLE ELBOWS

The DERC Speed Regulated Pipe Cleaner (SPC) is developed for high pressure water jet cleaning of bended pipes. The nozzles of this industrial pipe cleaner are water driven and suitable for working pressures up to 1500 Bar.

#### **Rotation Speed Control**

All SPC nozzles are equipped with an easy adjustable rotation speed control and are provided with a hardened protection ring. The compact, stainless steel design ensures that this nozzle can unplug, polish or run longer lines without any problem.

#### Three Sizes: SPC-S, SPC-M and SPC-L

The rotating speed can be adjusted, depending on the level of deposit. DERC SPC is available in three sizes: SPC-S, SPC-M and SPC-L. The SPC-L is designed and constructed for waterblast cleaning of industrial pipes as small as 6" with elbows and up. The SPC-M is for cleaning 4" pipes. And the SPC-S is made for the same work in pipes as small as 2" with elbows.

#### **FEATURES**

- 2" 4" 6" model
- Compact and short design
- Adjustable rotation speed by an adjusting nut
- Long life of high pressure seals
- Max. workingpressure 1500 Bar/ 22K
- One type of oil
- Optional storage case

#### **APPLICATIONS**

• Cleaning pipes with mutiple elbows

#### **SPC Storage Case**

To securely transport your SPC we provide an (optional) storage case.

#### **DERC** Speed Regulated Pipe Cleaner **SPC**





#### SPC-S

Max. Pressure	1000 bar / 15K	1500 bar / 22K	
Flow	30 - 50 l/min / 8-13gpm	30 - 50 I/min / 8-13gpm	
Inlet Connection	1/4" NPT F	¼" BSP, 3/8" UNF LH 3/8" UNF RH, 9/16" UNF LH/RHF	
Rotation Speed	100 - 300 RPM (adjustable)	100 - 300 RPM (adjustable)	
<b>Pipe Sizes</b> 2" – 4" (DN50 - DN100) 2"		2" - 4" (DN50 - DN100)	
Inserts	7 x M4 (046.xxx)	7 x M4 (046.xxx)	
Diameter	Ø 35 mm	Ø 35 mm	



#### Centralizer

The DERC SPC Centralizer makes it possible to centre the DERC SPC-M and SPC-L. This is protecting the rotating nozzle and for achieving the best cleaning result.

#### **SPC Toolkit**

The DERC SPC comes with a special tool for manual setting of the braking / speed adjustment.



#### **DERC** Speed Regulated Pipe Cleaner **SPC**







SPC-M		
Max. Pressure	1000 bar / 15K	1500 bar / 22K
Flow	50 - 115 l/min / 13-30gpm	50 -100 l/min / 13-26gpm
Inlet Connection	3/8" NPT F	M24 x 1.5 DKOS, 3/4" type M, 3/4" 16 UNF M
Rotation Speed	50-300 RPM (adjustable)	50-300 RPM (adjustable)
Pipe Sizes	4"- 8" (DN100 - DN200)	4"- 8" (DN100 - DN200)
Inserts	5 x 1/8" NPT (DI 18.xxx)	5 x 1/8" NPT (DI 18.xxx)
Diameter	Ø 69 mm	Ø 69 mm





SPC-L		
Max. Pressure	1000 bar / 15K	1500 bar / 22K
Flow	55 - 210 l/min / 14.5 - 55.5gpm	50 -170 l/min / 13 - 45gpm
Inlet Connection	1/2" NPT F	M24 x 1.5 DKOS, M36 x 2 DKOS 9/16" MPF (13/16")
Rotation Speed	50-300 RPM (adjustable)	50-300 RPM (adjustable)
Pipe Sizes	6"- 12" (DN150 - DN300)	6"- 12" (DN150 - DN300)
Inserts	5 x 1/4" NPT (DSI 14.xxx)	5 x 1/4" NPT (DSI 14.xxx)
Diameter	Ø 95 mm	Ø 95 mm





## DERC Speed Regulated Pipe Cleaner SPC-UH



### CLEANING PIPES WITH MULTIPLE ELBOWS UP TO 3000 BAR / 43K

The SPC-UH nozzles have a working pressure up to 3000 bar and are provided with a hardened protection ring.

#### **Modular Design**

The high pressure swivel with the adjustable break and the nozzle head are modular, in two parts. This design enables SPC-UH nozzle assemblies with different nozzle heads (R size) to suit your high pressure pump capacity.

#### Adjustable rotation speed

The rotation speed can easily be adjusted by hand (spanner) to adjust the SPC-UH tool for each application. The SPC-UH is designed and constructed for waterblast cleaning of pipes as small as 4" with elbows.

#### Centralizer

The DERC SPC Centralizer makes it possible to centre the DERC SPC-UH, thus protecting the rotating nozzle and achieve the best cleaning result.

#### **FEATURES**

- Heavy duty stainless steel construction
- Short and robust design
- Adjustable rotation speed by an adjusting nut
- Unique versatile tool due to modular design
- Low maintenance
- Long life of high pressure seals

#### APPLICATION

• UHP Cleaning of bended pipes as small as 4" with multiple elbows

#### **DERC** Speed Regulated Pipe Cleaner SPC-UH





#### Connections

The DERC SPC-UH is available with 3/4"UNF F (3/8"HP, H6) and 7/8"UNF M connection. For both these types we offer thermoplastic hoses of SpirStar to keep the complete assembly as short as possible.

#### 3/4" UNF F

Part No.	art No. SPC-UH-H6F-R4 S		SPC-UH-H6F-R8.5	
Max. Pressure	3000 bar	3000 bar	3000 bar	
Pressure 2500 bar	35/55 l/min	25-35 l/min	17-25 l/min	
Pressure 2800 bar	35/50 l/min	25-35 l/min	17-25 l/min	
Pressure 3000 bar	35/50 l/min	25-35 l/min	17-25 l/min	
Inlet Connection	3/4" UNF F	3/4" UNF F	3/4" UNF F	
Rotation Speed	100-500 rpm	100-500 rpm	100-500 rpm	
Inserts	5 x 965.xxx	5 x 965.xxx	5 x 965.xxx	
Length	114 mm	114 mm	114 mm	
Diameter	70 mm	70 mm	70 mm	
Weight	1,65 kg	1,65 kg	1,65 kg	
Max. Temp. Med.	80°C	80°C	80°C	

#### 7/8" UNF M

Part No.	SPC-UH-78UHM-R4	1-R4 SPC-UH-78UHM-R6 SPC-UH-78UHM	
Max. Pressure	3000 bar	3000 bar	3000 bar
Pressure 2500 bar	35-55 l/min	25-35 l/min	17-25 l/min
Pressure 2800 bar	35-50 l/min	25-35 l/min	17-25 l/min
Pressure 3000 bar	35-50 l/min	25-35 l/min	17-25 l/min
Inlet Connection	7/8" UNF M	7/8" UNF M	7/8" UNF M
Rotation Speed	100-500 rpm	100-500 rpm	100-500 rpm
Inserts	5 x 965.xxx	5 x 965.xxx	5 x 965.xxx
Length	133 mm	133 mm	133 mm
Diameter	70 mm	70 mm	70 mm
Weight	1,75 kg	1,75 kg	1,75 kg
Max. Temp. Med.	80°C	80°C	80°C



## **DERC** Centralizers CENT 8W / SPC / 6-8-10

#### **DERC Centralizers CENT 8W / SPC / 6-8-10**







#### CENTRALIZING YOUR NOZZLE IN PIPES

DERC Salotech designed centralizers to centre the rotating nozzle within the pipe, thus protecting the nozzle and the pipe walls and ensuring the best cleaning result.

#### **CENT 6-8-10 / CENT 8W**

Two models of centralizers are available for the SLC (see page 38):

- CENT 6-8-10
- CENT 8W

These centralizers allow the tools to work in bigger diameter pipe lines, drums, shells or columns.

The centralizers assure a good, consistent cleaning, correct jet distance to the pipe wall and guide the SLC through any bends or ducts.

The CENT 8W can also be used with any other tool (besides the SLC) where a centralizer is needed.

#### **FEATURES**

- Heavy duty stainless steel construction
- Easy to mount
- Protecting nozzles and pipe walls
- Optimize cleaning results

#### **APPLICATION**

• Centralizing SPC / SLC nozzles in pipes

#### **CENT SPC**

To centre the SPC (see page 44) within small lines, we offer a short stainless steel centralizer. This complete kit for three different diameters (6-8-10") is easy to adjust to another diameter by switching out the plastic fins.



CENT SPC

#### **CENT 6-8-10**

**CENT 6-8-10** 

Model	Range Inside Pipe Diameter	Rotating Nozzle
CENT 6-8-10	6"/8"/10" (DN150 - DN250)	SLC

CENT 8W			
Model	Range Inside Pipe Diameter	Rotating Nozzle	
CENT-8W-XL	35" - 56" (DN885 - DN1438)	SLC	
CENT-8W-L	26" - 40" (DN660 - DN1000)	SLC	
CENT-8W-M	22" - 30" (DN550 - DN750)	SLC	
CENT-8W-S	12" - 20" (DN300 - DN500)	SLC	

CENT SPC			
Model	Connection	Max. Pressure	Rotating Nozzle
CENT-SPC-38NM	3/8" NPT M	1000 bar	SPC-M
CENT-SPC-24M	M24x1.5 M	1500 bar	SPC-M/SPC-L
CENT-SPC-12NM	1/2" NPT M	1000 bar	SPC-L
CENT-SPC-36M	M36x2 M	1500 bar	SPC-L
CENT-SPC-H9LM	9/16" HP	3000 bar	SPC-UH



## **DERC** Rotary Coupling

## **Swivel RCS-UHS**



#### RUGGED DESIGN, EASY TO MAINTAIN

DERC RCS Ultra High pressure Swivels are designed to transport high pressure water from a stationary line to a rotating or twisting assembly.

#### **Rugged Design**

Heavy duty bearings, low torque rotation and the rugged design make the RCS-UHS suitable for many applications.



#### **FEATURES**

- Unique, improved and easy to maintain
- Available with various connections
- Heavy duty, stainless steel construction
- Low static torque for easy rotation
- 0° or 90° inlet connection
- Up to 2000 RPM
- Metric and UNF connections

#### **APPLICATIONS**

- Hose reels
- Automated systems and solutions
- Lance cleaning systems

#### **DERC Rotary Coupling Swivel RCS-UHS**







Inlet Connection	Shaft Connection	Diameter	Length	Max. Pressure	Max. Flow	Part No.
M30 X 2 F	M14 x 1.5 LH M	45 mm	165 mm	3000 bar	75 lpm	RCS-UHS-M14
1 1/8" - 12 UNF F	9/16"- 18 UNF LH M	45 mm	165 mm	3000 bar	75 lpm	RCS-UHS- 916HP
1 1/8" - 12 UNF F 90°	9/16"- 18 UNF LH M	45 mm	180 mm	3000 bar	75 lpm	RCS-UHS- 916HP 90°
1 1/8" - 12 UNF F	9/16"- 18 UNF LH M (long)	45 mm	200 mm	3000 bar	75 lpm	RCS-UHS-L- 916HP

MAINTENANCE KITS		
Description	Part No.	
Minor kit	RCS-UHS-100	
Major kit	RCS-UHS-300	
Tool kit	RCS-44-500	



53



## **DERC** Rotary Coupling Swivel RCS-UHS Mini

#### **DERC** Rotary Coupling Swivel RCS-UHS Mini







#### RUGGED DESIGN, EASY TO MAINTAIN

DERC RCS Ultra High pressure Swivels are designed to transport high pressure water from a stationary line to a rotating or twisting assembly.

#### Up To 3000 bar

The RCS-UHS Mini is specially designed for water jetting guns with maximum pressure up to 3000 bar.



#### **FEATURES**

- Heavy duty stainless steel construction
- Up to 3000 bar working pressure
- Up to 2000 RPM
- Low maintenance
- Metric and UNF connections
- Lightweight and compact
- Low torque, easy to rotate

#### **APPLICATIONS**

• High pressure guns



#### RCS-UHS MINI OPTIONS

10						
Inlet Connection	Shaft Connection	Diameter	Length	Max. Pressure	Max. Flow	Part No.
M26 x 1.5 F	M14 x 1.5 LH M	35 mm	125 mm	3000 bar	25 lpm	RCS-UHS-MINI.26F. M14ML
M26 x 1.5 F	9/16" - 18 UNF LH M	35 mm	135 mm	3000 bar	25 lpm	RCS-UHS-MI- NI.26F.916UML
M26 x 1.5 F 90°	M14 x 1.5 LH M	35 mm	138 mm	3000 bar	25 lpm	RCS-UHS-MINI.26F. M14ML-90
M26 x 1.5 F 90°	9/16"- 18 UNF LH M	35 mm	148 mm	3000 bar	25 lpm	RCS-UHS-MI- NI.26F.916UML-90

#### MAINTENANCE KITS

Description	Part No.
Minor kit	RCS-UHS-MINI-100
Major kit	RCS-UHS-MINI-300
Tool kit	RCS-44-500



55



## **DERC** Rotary Coupling Swivel RCS Mini

#### **DERC** Rotary Coupling Swivel RCS Mini







The DERC RCS-mini swivels are a complete range of swivels specially designed for jetting guns up to 1500 bar.



#### **FEATURES**

- Available with various connections
- Compact and lightweight
- Low torque, easy to rotate and low maintenance
- Small in diameter, easy to fit in combination
- with a hose sleeve
- Up to 600 RPM
- NPT, metric and UNF connections

#### **APPLICATIONS**

- Easy hose handling
- Prevents hose twisting
- Fits any gun



RCS MINI OPTIONS								
Inlet Connection	Shaft Connection	Diameter	Length	Max. Pressure	Max. Flow	Part No.		
1/2" NPT F	1/2" NPT M	35 mm	115 mm	1000 bar	80 lpm	RCS-MINI-12NMF		
M24 x 1.5 DKOS M	1/2" BSP MV	35 mm	125 mm	1500 bar	80 lpm	RCS-MINI-24M- 12MV		
M24 x 1.5 DKOS M	M22 x 1.5 MV	35 mm	125 mm	1500 bar	80 lpm	RCS-MINI-24M- 22MV		
13/16"-16 UN F	13/16"-16 UNF M	35 mm	120 mm	1500 bar	80 lpm	RCS-MINI-916MP		
M24 x 1,5 DKOS M	1/2" NPT M	35 mm	125 mm	1000 bar	80 lpm	RCS-MINI- 24M.12NM		
M24 x 1,5 DKOS M	1/2" NPT F	35 mm	135 mm	1000 bar	80 lpm	RCS-MINI- 24M.12NF		

MAINTENANCE KITS	
Description	Part No.
Minor kit	RCS-MINI-100
Major kit	RCS-MINI-300
Tool kit	RCS-44-500





## **DERC** Rotary Coupling **Swivel RCS-44**









#### LOW MAINTENANCE, EASY TO MAINTAIN

DERC RCS-44 swivels are designed to transport high pressure water from a stationary line to a rotating or twisting assembly. They feature replaceable seals, heavy duty ball bearings, a stainless steel construction and a low static torque for easy rotation.

#### Low Maintenance

The DERC RCS-44 swivels are low maintenance due to life lubricated bearings, no need to add grease. They are installed as standard equipment on our lancing machines and are available with either 0° or 90° inlets.



#### **FEATURES**

- Replaceable seals
- Lifetime lubricated ball bearings
- Low static torque for easy rotation
- Stainless steel construction
- 0° or 90° inlet connection
- Common metric wrench sizes
- NPT, metric and UNF threadings available
- Up to 600 RPM

#### **APPLICATIONS**

- Lancing machines
- Hose reels
- Rotating equipment

RCS-44 OPTIO	NS					
Inlet Shaft Connection Connection		Diameter	Length	Max. Pressure	Max. Flow	Part No.
1/2" NPT F	1/4" NPT M	44 mm	115 mm	1000 bar	140 lpm	RCS-44- 12NF.14NM
13/16" UNF F	9/16" UNF LH M	44 mm	155 mm	1500 bar	100 lpm	RCS-44-916MP
13/16"UNF F 90°	9/16"UNF LH M	44 mm	150 mm	1500 bar	100 lpm	RCS-44-

Description	Part No.
Major kit RCS-44 1500 bar	RCS-44-1500-300
Minor kit RCS-44 1500 bar	RCS-44-1500-100
Major kit RCS-44 1000 bar	RCS-44-300
Minor kit RCS-44 1000 bar	RCS-44-100
Tool kit RCS-44	RCS-44-500

**MAINTENANCE KITS** 



916MP-90°

59



## **DERC** Rotary Coupling Swivel RCS-75

#### **DERC Rotary Coupling Swivel RCS-75**





#### RUGGED DESIGN, EASY TO MAINTAIN

DERC RCS-75 swivels are designed to transport high pressure water from a stationary line to a rotating or twisting assembly. Heavy duty ball bearings, low torque rotation and the rugged design make the DERC RCS-75 suitable for many applications.

The swivels are low maintenance due to life lubricated bearings, no need to add grease. Available with either 0° or 90° inlets. Standard speed is up to 600 RPM. We also offer a high speed version with a speed up to 2000 RPM.



#### **FEATURES**

- Unique, improved and easy to maintain seal
- Lifetime lubricated bearings
- Multiple inlet options available
- Heavy duty stainless steel construction
- 0° or 90° inlet connection
- Common metric wrench sizes
- Available in metric, UNF and NPT threading
- Up to 600 RPM
- High Speed version up to 2000 RPM

#### **APPLICATIONS**

- Hose reels
- Automated systems and solutions
- Prevention of hose twist in large lines



RCS-75 OPTIONS						
Inlet Connection	Shaft Connection	Diameter	Length	Max. Pressure	Max. Flow	Part No.
M24 x 1.5 F	M24 x 1.5 M	75 mm	150 mm	1500 bar	400 lpm	RCS-75- 24FV.24MV
M24 x 1.5 F 90°	M24 x 1.5 M	75 mm	150 mm	1500 bar	400 lpm	RCS-75- 24FV.24MV 90°
3/4" NPT F	3/4" NPT M	75 mm	150 mm	1000 bar	400 lpm	RCS-75- 34NF.34NM
3/4" NPT F	M24 x 1.5 M	75 mm	150 mm	1000 bar	400 lpm	RCS-75- 34NF.24MV
3/4" NPT F 90°	3/4" NPT M	75 mm	150 mm	1000 bar	400 lpm	RCS-75- 34NF.34NM 90°
M24 x 1.5 M	M24 x 1.5 M	75 mm	180 mm	1500 bar	400 lpm	RCS-75-24M.24MV
M36 x 2 M	M24 x 1.5 M	75 mm	200 mm	1500 bar	400 lpm	RCS-75-36M.24MV
3/4" - 14 NPS	3/4" UNF M LH	75 mm	154 mm	1500 bar	400 lpm	RCS-75-M12F. M12M
3/4" - 14 NPS 90°	3/4" UNF M LH	75 mm	154 mm	1500 bar	400 lpm	RCS-75-M12F. M12M 90°
M24 x 1.5 M	M24 x 1.5 M (long)	75 mm	225 mm	1500 bar	400 lpm	RCS-75- 24FV.24MV-L

Description	Part No.
Major kit RCS75 1500 bar	RCS-75-300
Minor kit RCS75 1500 bar	RCS -75-100
Tool kit RC-S75 / SLC	RCS-SLC-500

MAINTENANCE KITS



61

CALL US +31 186 - 62 14 84



### **DERC Mini Turret**

#### **DERC** Mini Turret









#### THE PERFECT SOLUTION FOR CLEANING CONFINED SPACES, TANKS OR REACTORS

The DERC Mini Turret is an easy to install tool for automated cleaning of tanks or confined spaces. The base of the tool is a flanged base plate with on top the automated jetting arm. The jetting arm of the Mini Turret is designed in a way that it can move up/down, rotation +/-, nozzle up/down or oscillation. This allows the realisation of a 3D cleaning effect.

#### **Light Weight Version or Stainless Steel**

The Mini Turret can be supplied in an aluminium light weight version or in stainless steel. The stainless steel version is suitable to work both with high pressure or for chemicals.

#### **Easy Operation**

For easy operation the Mini Turret can be equipped with a camera system and monitor. The camera's are installed on the jetting arm, one near the flange and one next to the nozzle.

#### **FEATURES**

- Mini tank canon for cleaning confined spaces
- Air driven
- Unique and precise positioning
- Suitable for chemical and high pressure cleaning
- Fully automatic
- 3D cleaning effect

#### APPLICATION

• Cleaning confined spaces, tanks or reactors

#### **SPECIFICATIONS** Max. Pressure 1000 bar Max. Flow 130 lpm Flange 16" 3000# Reach 500-1500 mm under flange Drive Movements Nozzle 135° angle range oscillating, arm up/down, arm rotation Model L/226 high speed jet Nozzle Material Lightweight version aluminium approx. 60Kg / Stainless steel version approx. 90Kg Chemical cleaning set, swivel, nozzle manifold, automated rotation, 2 end switches **Options** installed so the Mini Turret rotates back and forth in a set angle/area, camerasystem



## **DERC** Tank Cleaning **Tools**



#### POSITIONING TOOLS & TANK CLEANING HEADS

#### **DERC Positioning Tools TWK**

The DERC Positioning Tools makes it easy to position and fixate your tank cleaning head inside a vessel or storage tank.

#### Three Models

The PL.10000-H-M2 comes with a hollow guide tube, to fit a high pressure hose. The PL.20000-L is equipped with a high pressure rigid lance. The FPK-TWK-24" is designed to position the tank cleaning head through a 24" manhole.



#### **FEATURES POSITIONING TOOLS**

- Inspection cover
- Stainless steel construction
- Place at an angle

#### **APPLICATION**

• Tank or vessel cleaning

#### **Tank Cleaning Heads**

DERC Salotech offers a full range of compatible Aquamat and Bolondi high pressure tank cleaning heads.

#### **DERC** Tank Cleaning Tools





#### **POSITIONING TOOL PL.10000-H-M2**

93	Max. Pressure	Model Lance	Angle	Diameter Flange	Connections
San Su	Depending on hose	Max. 8 m length	2x 45°	650 mm	Bronze guide bush on both sides, to protect the high pressure hose

#### **POSITIONING TOOL PL.20000-L**

Max. Pressure	Model Lance	Angle	Diameter Flange	Connections
1500 bar	1" high pressure lance, max. 6 m length	2x 45°	450 mm	1" BSP cleaning head, o-ring sealing on both sides. Nipples for all different tank cleaning units and hose connections

#### TANK CLEANING HEADS



#### **AQUAMAT L 1500 PLUS**

Max. pressure: 1500 bar Flow rate: 300 lpm Tank opening: min. Ø 130 mm



#### **AQUAMAT XL 1600 PLUS**

Max. pressure: 1600 bar Flow rate: 450 lpm Tank opening: min. Ø 150 mm



#### **AQUAMAT XXL 1600 PLUS**

Max. pressure: 1600 bar Flow rate: 700 lpm Tank opening: min. Ø 300 mm



#### **AQUAMAT SELECT**

Max. pressure: 1600 bar Flow rate: 500 lpm Tank opening: min. Ø 300 mm



#### **BOLONDI MW586A**

Max. pressure: 500 bar Flow rate: 60 lpm Tank opening: min. Ø 140 mm



#### **BOLONDI RW086A**

Max. pressure: 200 bar Flow rate: 60 lpm Tank opening: min. Ø 144 mm



## **DERC** Abrasive Cutting





#### SAFE AND EFFECTIVE SOLUTION FOR CUTTING METAL

The DERC Abrasive Water Jet Cutting System is designed and manufactured for industrial cold cutting applications with ultra-high pressure water.

The system consist of a cold cutting head which is moved over the FlexTrack by means of the so called power head. The powerhead is a direct drive model driven by an air engine and is able to move over the FlexTrack (straight or curved objects). The same powerhead also drives over the so called pipe bands which are used for pipe cutting.



#### **FEATURES**

- Powerhead, direct drive
- Cutting Nozzle
- Magnetic Flex Track, vacuum, permanent magnets or switchable magnets
- Hopper with abrasive monitoring system
- Control panel

#### **APPLICATIONS**

• Industrial cold cutting of metal

#### **DERC** Abrasive Cutting System





#### Hopper

The abrasive which runs to the cold cutting head is stored into the hopper. This hopper is dolly mounted for easy transportation on the job site. The abrasive feed rate is controlled by the abrasive monitoring device ensuring a constant well adjustable flow of abrasive. The feeding of the abrasive is done by the venturi inside the nozzle.



#### **BASIC CUTTING SET**


Part No.	Description
D.CUT.TRACK.PM	FlexTrack direct drive, 1,5Mtr. made from stainless steel spring steel with permanent magnets
D.CUT.TRACK.SM	FlexTrack direct drive, 1,5Mtr. made from stainless steel spring steel with switchable magnets
D.CUT.TRACK.VP	FlexTrack direct drive, 1,5Mtr. made from stainless steel spring steel with vacuum pads
D.CUT.POWERHEAD	Powerhead direct drive complete Air, delivered complete with cutting head holder to cut parallel and perpendicular
D.ABHOPPER.AS-B	Hopper Assy. stainless steel trolley, complete with abrasive monitoring system and abrasive transport hose
CPA-AWCS-VAC	Control panel for abrasive cutting system, complete with 3 hoses, for VACU PADS
D.ABCUTTIN.AS	Cutting Nozzle Assembly complete 3000 Bar




#### **DERC** Abrasive Cutting System


#### **DERC** Abrasive Cutting System



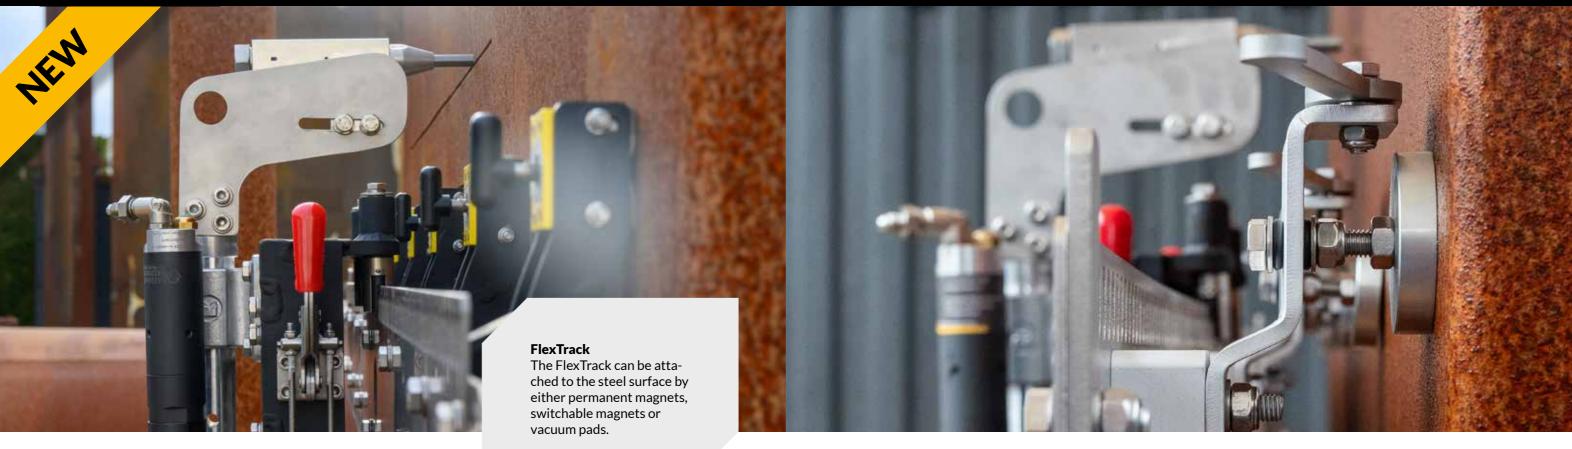

#### FLEXTRACK WITH SWITCHABLE MAGNETS

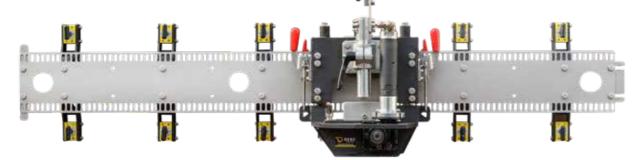


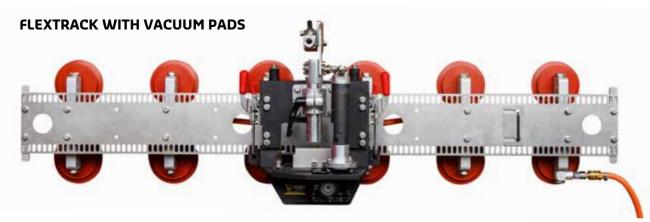

#### FLEXTRACK WITH PERMANENT MAGNETS





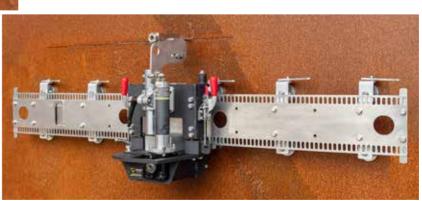

CALL US +31 186 - 62 14 84

68



#### **DERC** Abrasive Cutting System

12" PIPE BAND

REDUCER BLOCKS
FOR 12"PIPE BAND

#### **OPTIONAL PIPE BANDS**

Part No.	Description
D.PB.12	Pipe Band 12" direct drive
D.PB.14	Pipe Band 14" direct drive
D.PB.16	Pipe Band 16" direct drive
D.PB.18	Pipe Band 18" direct drive
D.PB.20	Pipe Band 20" direct drive
D.PB.24	Pipe Band 24" direct drive
D.PB-RB-6	Reducer Block Set for 12"pipe band to reduce to 6"
D.PB.RB-8	Reducer Block Set for 12"pipe band to reduce to 8"
D.PB.RB-10	Reducer Block Set for 12"pipe band to reduce to 10"

**DERC** Abrasive Cutting System





INSIDE PIPE CUTTER



#### **Custom Solutions**

For more special jobs DERC Salotech delivers a wide range of options and custom made solutions like:

- Pipe bands for cutting pipes
- Manhole cutter
- Cutting window for special shapes or objects
- Radius cutter for small diameters and or radius cutting

#### MANHOLE CUTTER



Part No.	Description
D.ABMCUTTER.AS	Manhole Cutter Air DN450-800 with permanent magnets
D.ABMCUTTER.AS-RMAG	Manhole Cutter Air DN450-800 with releasable magnets
D.RADCUTTER	Radius Cutter Air DN50 - DN450
D.AB.IC.XX	Inside Pipe Cutter Tool
D.AB.MOD.WIN	Modular Cutting Window
D.ABCUTTIN.03	Spare cone TC for cutting nozzle
D.ABCUTTIN.10	Spare slurry nozzle TC for cutting nozzle 2,5mm
D.ABCUTTIN.10.20	Spare slurry nozzle TC for cutting nozzle 2,0mm
D.ABCUTTIN.10.30	Spare slurry nozzle TC for cutting nozzle 3,0mm
965.XXX	HP Nozzle M10 model 965

### DER C

# **DERC** MagTrack



# MODULAR MAGNETIC CRAWLER FOR SURFACE PREPARATION

The DERC MagTrack robots are magnetic crawlers, electrically driven, suitable for multi purpose applications. MagTrack is a modular system that is built around an universal carrier.

The crawlers are designed to be used on flat and curved steel surfaces. Depending on the application, the carrier can easily be fitted with a full range of modular tools, either based on water jetting or abrasive (sand)blasting. All water jetting tools work with high pressure jets up to 3000 bar.



#### **FEATURES**

- Compact design, fits through a 24" manhole
- No more scaffolding or cherry pickers
- Can be operated by one man
- Low in maintenance
- Set-up in 30 minutes
- ATEX zone II certified (water jetting)
- Remote controlled

### **APPLICATIONS**

- Surface preparation
- Oil storage tank cleaning
- Industrial cleaning and washing
- Cargo hold cleaning
- Abrasive blasting
- Inspection
- Waterjet cutting

### **DERC MagTrack**





#### **WATER JETTING TOOLS:**

### Swing Arm

Open waterblasting for industrial (tank) cleaning and surface preparation (ship hulls for example)

#### • Tilt Swing Arm

Open waterblasting for easy cleaning of (oil) storage tank wind girders

### Blast Can

Closed waterblasting for industrial (tank) cleaning and surface preparation (ship hulls for example)

### • Curved Blast Can

Closed waterblasting for small storage tanks and highly curved surfaces

#### MagTrack Mini

Closed waterblasting for cleaning round/straight surfaces, easy to transport


72




### **DERC** MagTrack

### **DERC** MagTrack



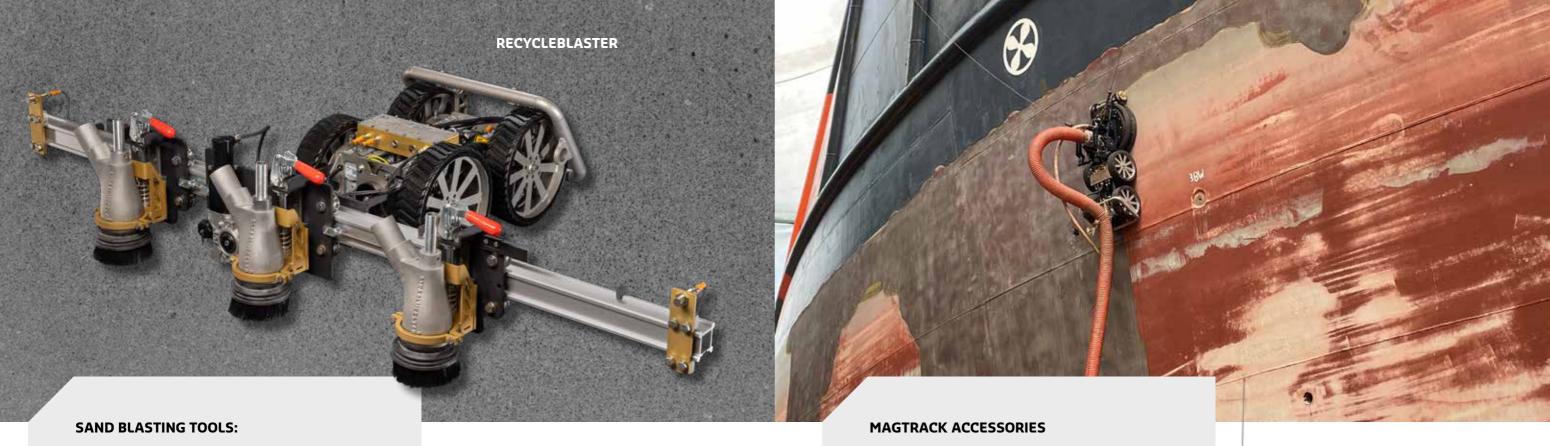

- Sandblaster Swing Arm
   Open sandblasting for surface preparation (ship hulls for example)
- Sandblaster Tilt Swing Arm
  Open sandblasting for surface preparation
- RecycleBlaster
  Closed circuit sandblasting for surface preparation (ship hulls for example)

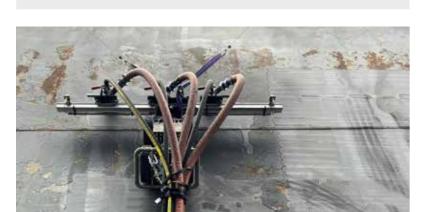

SANDBLASTER TILT SWING ARM

- Main Control Unit
   Powers and controls the MagTrack robot (ATEX optional)
- Remote Controller
  Operate the MagTrack at a safe distance
- Fall Arrestor (optional)
   To safely secure your MagTrack when working om vertical surfaces
- Transport Plate
  For easy transport and safe deployment to the surface
- LED Lights (optional)
   Optional ATEX lights to increase visibility inside (oil) storage tanks
- Wall Contact Switch (optional)
   When MagTrack detaches from the surface it automatically switches of the high pressure water
- Magnetic Antenna Foot with Extension Cable / Antenna Cable 30 meter





CALL US +31 186 - 62 14 84

74

75



# **DERC** Hydro-Jet Mower

### **DERC** Hydro-Jet Mower







The DERC Hydro-Jet-Mower is a rotating surface cleaner for cleaning floors, grates, decks or other surfaces with high pressure water jets. The base is a stainless steel 4-wheel carriage with an ergonomic adjustable push bar. We offer two models with different maximum working pressure: 1500 bar / 22K and 3000 bar / 43K.

The Hydro-Jet Mower can be supplied with the following options:

- Vacuum Attachment: double dome vacuum ring model with 3"connection 90°. Completely
- Mechanical Dump Valve: High Pressure Dump Valve 1500 bar/ 22K PSI or 3000 bar / 43K PSI complete installed with controls to push bar.
- Electric Control: electric pressure on/off switch complete installed with controls to push bar. Supplied with necessary plug 4 or 7 Pin.
- Standard 6 weight plates included, with possibility to order more.

### **FEATURES**

- Stainless steel carriage
- 4-Wheel, 2 fix, 2 flex zinc plated
- Push bar adjustable with hand grips
- Rubber sealing
- 4-jet arm manifold (1500 bar version)
- 6-jet arm manifold (3000 bar version)
- 1500 bar / 22K PSI or 3000 bar / 43K PSI

### **APPLICATION**

• Cleaning floors, grates, decks and other surfaces

SPECIFICATIONS	
Dimensions (L x W x H)	1275 x 470 x 1100 mm
Cleaning Path	400 mm
Weight (excl. plates)	53 / 55 kg
Weight Plate	5 kg
Max. Pressure	1500 or 3000 bar
Max. Flow 1500 bar	140 lpm
Connection 1500 bar	M24x1,5 female flat
Type Insert Nozzle 1500 bar	DSI14-XXX
Max. Flow 3000 bar	75 lpm
Connection 3000 bar	1 1/8"-12 UNF female
Type Insert Nozzle 3000 bar	964.XXX
Vacuum Connection	3" camlock
Max. Rotation Speed	2500 rpm
Max. Temperature	70 °C

OPTIONS 1500 BAR / 22K PSI MODEL		
Description	Part No.	
Basic Surface Cleaner	DHM-1500-18	
Vacuum Attachment	DHM-VA-3	
Dump Valve	DHM-DV-1500	
Electric Control (plug 4 or 7 pin)	DHM-EC-4 or DHM-EC-7	
OPTIONS 3000 BAR	/ 43K PSI MODEL	
Description	Part No.	
Basic Surface Cleaner	DHM-3000-18	
Vacuum Attachment	DHM-VA-3	

PFIIONS 1500 BAR / EER FSI MODEL		
Description	Part No.	
Basic Surface Cleaner	DHM-1500-18	
acuum Attachment	DHM-VA-3	
Dump Valve	DHM-DV-1500	
Electric Control plug 4 or 7 pin)	DHM-EC-4 or DHM-EC-7	

OPTIONS 3000 BAR / 43K PSI MODEL		
Description	Part No.	
Basic Surface Cleaner	DHM-3000-18	
Vacuum Attachment	DHM-VA-3	
Dump Valve	DHM-DV-3000	
Electric Control (plug 4 or 7 pin)	DHM-EC-4 or DHM-EC-7	

77




# **DERC** Rotary Coupling Swivel RCS-500



### PNEUMATIC OR HYDRAULIC BELT DRIVEN **CLEANING TOOL**

The DERC RCS-500 is a fast rotation tool, which is belt driven to operate till 1.000 rpm. The DERC RCS-500-A uses an air motor and the DERC RCS-500-H is powered by a hydraulic motor.

Powered rotation units control rotation speeds and allow the use of a wide variety of head configurations for diverse cleaning applications.



### **FEATURES**

- Fast rotation cuts deposits quickly with less striping or effect on the surface
- Radiused arms produce powerful and effective jets
- Adaptable head configuration can be customized for a large range of applications
- Replaceable nozzle tips maximize

### **APPLICATIONS**

- External tube bundle cleaning, mounted on a rail and tractor System
- Floors, conveyors and large surfaces
- Surface preparation

### **DERC Rotary Coupling Swivel RCS-500**









### **DERC RCS-500-A**

8	Max. Pressure	Inlet Connections 0° or 90°	Drive	Rotation Speed	Max. Flow
	1000 bar	3/4" NPT	Air	1000 rpm	190 lpm
	1500 bar	M24x1,5, 3/4" NPS	Air	1000 rpm	155 lpm
	3000 bar	1 1/8" UNF	Air	1000 rpm	75 lpm

### **DERC RCS-500-H**

Max. Pressure	Inlet Connections 0° or 90°	Drive	Rotation Speed	Max. Flow
1000 bar	3/4" NPT	Hydraulic	1000 rpm	190 lpm
1500 bar	M24x1,5, 3/4" NPS	Hydraulic	1000 rpm	155 lpm
3000 bar	1 1/8" UNF	Hydraulic	1000 rpm	75 lpm

### **OPTIONAL ARMS AND HEADS**

Arm Type	Nozzle Type	Max. Pressure	
RCS-230B-M20-T4	Type 04 nozzles	1500 bar	Complete with flow stabilizers and nozzle caps
RCS-230B-M20-T226	Type 226 nozzles	1000 bar	Complete with flow stabilizers and nozzle caps
RCS-230B-14NF	DI 14 nozzles	1000 bar	With integrated flow inducer

Arms and heads for 3000 bar version can be configured on request



### **RD Masterjet**



The RD Masterjet rotor jets convert the high effectiveness of round jet nozzles into area performance through rotating nozzle heads. It has an optimum internal flow, which allows the pump's total performance to be used without loss of energy. Various nozzle configurations and adjustable speeds open up many possibilities for surface treatment.



SPECIFICATIONS			
Part No.	Connection	Max. Pressure	
2/4 nozzles	1800 bar	60 lpm	
2/4 nozzles	3200 bar	50 lpm	
2/4 nozzles "ATEX"	3200 bar	50 lpm	
2/4 nozzles "Low Flow"	3200 bar	20 lpm	
5 nozzles	3200 bar	50 lpm	
3/6 nozzles	1800 bar	60 lpm	
3/6 nozzles	3200 bar	50 lpm	







80

### **Features Masterjet**

- High energy efficiency
- Versatile; 2, 3, 4, 5 or 6 nozzle inserts
- Variable rotation speed (1000 3500 rpm, 3 settings available)
- Speed adjustable by moving outer sleeve
- Easy maintenance
- Max. working pressure 3200 bar / 46K

### **Monro-Jet Nozzles**



MONRO-JET® nozzles combine the high power of the point jet with the large area output of the flat jet. They can be used with all approved high-pressure fittings and mounted on lances.

There a six different models. The operating pressure ranges from 500 bar up to 2500 bar, depending on the model. For each model there are also different connection thread types available.



MONRO-JET F1 1500 bar



MONRO-JET F2 1000 bar



MONRO-JET F3 800 bar



MONRO-JET F4 500 bar



500 bar

Con Constitution of the Co

MONRO-JET F25 2500 bar



# **DERC** Hydraulic Hose Reel









### SMOOTH AND CONTROLLED (RE)TRACTION OF HOSES

### **Versatile Functionality**

DERC Salotech provides cutting-edge hydraulic hose reel solutions for efficient cleaning of long pipelines. Our high-pressure hose reels are designed to handle up to 3000 Bar/43,000 PSI, making them ideal for demanding tasks. They are suitable for both storage and water jet pipe cleaning purposes, offering versatile functionality.

### **Simplifying Cleaning Operations**

The hydraulic drive system ensures smooth and controlled (re)traction of the hose, simplifying handling during cleaning operations.



#### **FEATURES**

- Hydraulic drive
- Automated retraction of hoses
- Rugged steel construction
- Up to 3000 bar

### **APPLICATIONS**

- Smooth and controlled (re)traction of hoses during cleaning operations
- Storage of (high pressure) hoses

### **Custom Solutions**

DERC Salotech has extensive experience in designing and supplying high-quality hose reels, tailored to different applications. Whether you need a reel for storage purposes or to facilitate water jet pipe cleaning, we can assist you in finding the right solution for your needs. By choosing our hydraulic hose reel solutions, you can enhance productivity and streamline your cleaning processes.





83




# DERC Air PreHeater Cleaner APC

**DERC** Air Preheater Cleaner APC





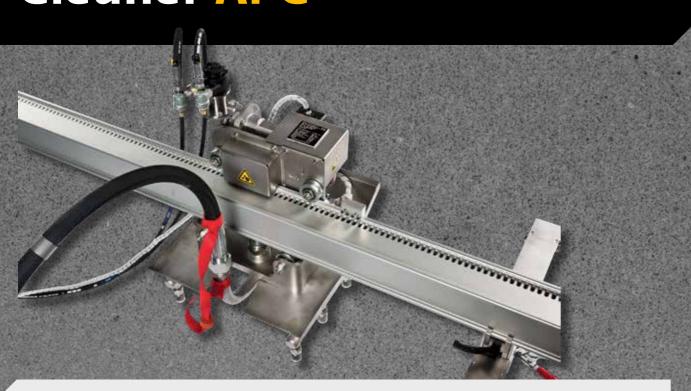

### PLC CONTROLLED WATER JETTING OF AIR PREHEATERS

The DERC Air Preheater Cleaner The DERC Air Preheater Cleaner is designed to clean Air Preheaters with high pressure waterjetting in a safe, effective, efficient and ergonomic way. It is PLC controlled and is operated with a touchscreen interface.

#### **Air Preheater Rails**

The Air Preheater Cleaner moves along an aluminum rail. The rail has slotted holes in which the carriage moves. The rail is mounted on the in- and outside of the air preheater with two supplied clamps. The electric motor with encoder and the PLC provide an extremely accurate positioning of the carriage of the cleaning manifold (+/- 1 mm).

### Manifold & Flows

The Air Preheater Cleaner will be delivered with a high pressure manifold. You can choose a 4- or 5-jet manifold with a maximum working pressure of 700 bar/ 10K. The maximum capacity of the air preheater cleaner depends on the span of the rails. For extreme high flows or pressures, we recommend the XXL-version.

### **FEATURES**

- PLC-controlled
- Ergonomic cleaning, cleaning right on time and perfect place
- Operating at a safe distance
- Programmable by the operator or parametric programming
- Set up with touchscreen
- Datalogging possible
- Full electrical control
- Different types of manifolds possible
- Remote control panel
- Double-sided cleaning, of the top and bottom

#### **APPLICATIONS**

• Automated cleaning of air preheaters



The operator monitors the cleaning at a safe distance, outside "the line of fire". The PLC automatically controls the process. The operator chooses which program to use. There is an automatic program; the Air Preheater Cleaner calculates the steps on the given parameters or the operator defines the steps and cleaning time.

During the proces, the operator can either interrupt, change or restart the program or control the system manually. The logged data has an unique identity and can be downloaded via the USB port.





CALL US +31 186 - 62 14 84

85




# DERC Air PreHeater Cleaner XXL APC XXL

**DERC** Air Preheater Cleaner XXL APC XXL





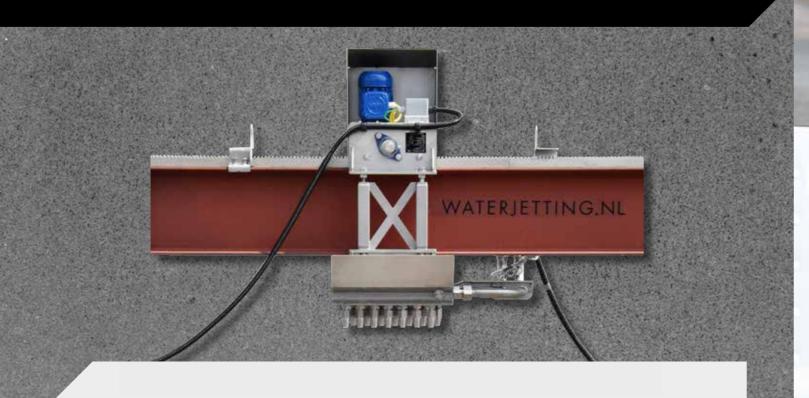

# HIGH PRESSURE CLEANING OF A HIGH CAPACITY ROTATING AIR PREHEATER

The DERC PLC-controlled Air Preheater Cleaner XXL is a full automatic PLC controlled Air Preheater Cleaner with touch screen interface.

#### **High Capacity Cleaning**

This APC XXL-version is able to clean a rotating air preheater with a diameter of 19 meters at a very high capacity of 2x 1000 litre per minute at 500 bar/7K. The Air Preheater cleaner moves on a sectionalized guide rail of 10,5 metre and can be positioned very fast with high precision (+/-1 millimeter).

#### **Manifold with 14 Nozzles**

An electrically powered carriage with ball-bearing wheels moves the manifold. Each manifold holds 14 nozzles (2x M42 DKOS).

### **Operation at a Safe Distance**

The operator operates the Air Preheater Cleaner with the touch screen, at a safe distance, outside the air preheater.

### **FEATURES**

- PLC controlled
- Touch screen control
- Parameters programmable
- Fully electric control
- Data logging possible
- Different types of manifolds possible
- Linkable to your high pressure unit(s)
- Double-sided cleaning, of the top and bottom

### **APPLICATIONS**

• Automated cleaning of high capacity rotating air preheaters

### **Control Box**

Per cleaning job, the operator can set up the cleaning parameters on the touch screen of the control box. Some parameters are: outside diameter, inside diameter, rotational speed of the air preheater, width of the manifold and the overlap in relation to the previous cleaning position.







# DERC Hydroblast 4+ Hose



### VERSATILE RUBBER HIGH PRESSURE HOSE





The DERC HYDROBLAST 4+ industrial high pressure hose is specially developed for the high pressure cleaning industry.

#### Up to 1100 Bar

The hose is capable of working pressures until 1100 bar and is produced with only 4 spiral layers, so a 3/4" hose is still manageable.

#### **Light Weight and Flexible**

The hose has a short bend radius, is light weight and can be used with a water temperature up to 80° C.

### Versatile

The Hydroblast 4+ hose is available with NPT or mertric couplings. And with 90° bended couplings M24 and M36.

#### Sizes

The hose is available in 3/8" (DN10), 1/2" (DN12) and 3/4" (DN20).

#### **FEATURES**

- Suitable for high temperature till 80° C
- Light weight and flexible
- Resistant outer core
- Certified according the latest NEN standards
- Bigger bore couplings, less pressure loss
- Available with safety marking rings or safety hose catcher rings

#### **APPLICATIONS**

• Industrial high pressure hose

### **SPIR STAR Hoses**





### **AUTHORIZED DEALER & ASSEMBLY CENTER**

### SPIR STAR Thermoplastic High Pressure Hoses

For waterblasting DERC Salotech supplies SPIR STAR thermoplastic high pressure hoses, strengthened with spiralized high tensile steel.

These hoses are available with 2, 4, 6 and 8 layers suitable for working pressures up to 4000 bar.

Specially designed for all kind of applications in the water blasting industry makes this complete line of hoses the key for a water blasting success.




### **Assembly Center**

DERC Salotech is a trained and official assembly center of SPIR STAR hose assemblies.

Our people are experienced, trained and frequently updated in assembling SPIR STAR products to ensure both quality and safety.

Due to the fact that we make the hose assemblies ourselves we can assure a good service for both the delivery time and repairs.

89



CALL US +31 186 - 62 14 84

88

### DERC SALOTECH

# **DERC Hose Catchers**



## THE SAFE WAY FOR MANUAL CLEANING PIPES, TUBES OR HEAT EXCHANGERS

DERC Salotech designed a complete line of Hose Catchers, which provide a safe way of cleaning pipes manually.

#### **Ultimate Protection**

When cleaning pipes and tubes there is a risk the nozzle could come out of the pipe backwards. To protect the operator DERC Salotech offers a full range of Hose Catchers.

#### **Hose Catcher for Every Job**

The DERC Hose Catchers are available in the following types:

- VE.20000 for cleaning pipe lines
- VE.21000-22000 for cleaning pipes in small spaces
- VE.40000 for cleaning vertical heat exchangers
- VE.70500 for cleaning heat exchangers
- VE.80000 for cleaning larger pipes (up to 400 mm OD)

#### **FEATURES**

- Stainless steel construction
- Adaptable to different pipe sizes
- Easy and fast mounting
- Hose stoppers in different sizes

### **APPLICATION**

• Protecting operator when manual cleaning pipes, tubes or heat exchangers

### **DERC Hose Catcher VE.20000**



The DERC Hose Catcher VE.20000 is specially constructed as an adjustable accessory tool for the safe high pressure cleaning of pipe lines, by means of a hose with a jetting nozzle mounted on the end. Hoses of different diameters can be used due to the adjustable clamp.

### **Optional Equipment VE.20000**

The VE.20500 Extension Kit consists of two stainless steel square tubes, which make it possible to connect the VE.20000 to bigger diameter pipes or shells.

The easy to connect VE.20600 Hook On Kit makes it possible to strap the Hose Catcher VE.20000 onto non-flanged pipe lines.





### **Hose Stoppers**

Every Hose Catcher, except the VE.20000, VE.21000 and VE.22000, is equipped with hose stoppers for different flex hoses diameters.

The hose stopper ensures that the hose stops at the right moment. The stoppers can be stored in the cassette, which is located on the Hose Catcher, to keep everything together.

### **DERC Hose Catcher VE.21000-22000**



The VE.21000-22000 Hose Catcher is especially designed to work with flex lances in small spaces. This Hose Catcher can be mounted on a flange of a pipe between 3" and 6" and can be supplied without a splash plate (VE.21000) or with a splash plate (VE.22000). It is also possible to store the different hose stoppers in an optional storage box (VE.21500).

### Features VE.21000-22000

- Easy mounting on the flange of a pipe
- Suitable for horizontal and vertical applications
- Supplied with or without splash plate
- Splash plate available in different sizes





### **DERC Hose Catcher VE.40000**



The DERC Hose Catcher type VE.40000 is specially constructed as an adjustable accessory tool for the safe manual high pressure cleaning of vertical heat exchangers with flex lances. Hoses of different diameters can be used due to various hose stoppers. We supply the vertical tube in a variety of dimensions.





### **DERC Hose Catcher VE.70500**



The DERC Hose Catcher type VE.70500 is a specially constructed adjustable auxiliary tool for cleaning pipe bundles by means of a hose with a jetting nozzle mounted to the front. All the pipes in the bundle can be reached because of the construction with two hinged points.

The advantage of the modular construction of the hose catcher is that an adaptor can be mounted to a foot pedal so that a vertical heat exchanger can be cleaned. Besides this the hose catcher can be used for one single pipe after removal of the hinged arm. The hose catcher can be mounted to a pipe or heat exchanger in various ways.

Flex hoses of different diameters can be used due to the various diameters of the interchangeable Hose Stoppers.

A round transparent (Lexan) plate has been mounted on to protect the operator from backsplash water.





### **DERC Hose Catcher VE.80000**



The DERC Hose Catcher type VE.80000 is a specially constructed adjustable auxiliary tool for safe high pressure cleaning of pipes by means of a hose with a jetting nozzle mounted to the front.

The Hose Catcher consists of a stainless steel base plate with 3 connections; one for 1/2", one for 3/4" high pressure hoses and one for flex lances in various diameters. Flex lances of different diameters can be used due to the various diameters of the interchangeable Hose Stoppers. These Hose Stoppers are stored in the cassette to prevent losing them. The 1/2" and 3/4" connections are nuts which function as hose stoppers. All parts are as much as possible fixed to the base plate to keep everything together.

The Hose Catcher can be mounted on the pipe in various ways; mountable clamps, bolts or when there is no flange, with lashing.









# **DERC** Hose Safety Systems



# FOR SAFE USAGE AND CONNECTING HIGH PRESSURE HOSES

DERC Salotech offers the following safety products for using and connecting hoses:

#### **DERC Hose Fixation Sling**

DERC Salotech offers Hose Fixation Slings for securing vertical lined up hoses; a reliable connection point that adapts to numerous anchor points.

### **DERC Hose Grips**

Hose Grips are used as security between high pressure hoses in case the hose connection would fail. All Hose Grips and Whip Checks are supplied with a controlled quality declaration.

### **DERC Hose Whip Checks**

The Hose Whip Checks are required as safety measure to avoid injury in case of hose or coupling failure. The Hose Whip Check is an advanced and innovative version. Improved, safer and stronger designed for the (high) pressure hydraulic and water jetting market.

#### **FEATURES HOSE WHIP CHECKS**

- Steel internal wire covered with Kevlar and Polyester
- Loop design, it pulls tighter and tighter
- Suitable for small and bigger hose diameters
- Soft on the hands, no wires

### **APPLICATION HOSE SAFETY SYSTEMS**

• Protecting operator when using and connecting high pressure hoses

### **DERC** Hose Fixation Sling



SPECIFICATIONS		
Static Strength	22 kN	
Working Length	120 cm	
Webbing	20 mm	
Safety Standard	EN 795 class B	
Part No.	SIR.3	



### **DERC** Hose Grips



SPECIFICATION	IS	
Part No.	Diameter	Length
HG1.400.SS	Ø 7-14 mm	400 mm
HG2.400.SS	Ø 13-21 mm	400 mm
HG2.600.SS	Ø 13-21 mm	600 mm
HG3.400.SS	Ø 17-31 mm	400 mm
HG3.600.SS	Ø 17-31 mm	600 mm
HG4.400.SS	Ø 20-36 mm	400 mm
HG4.600.SS	Ø 20-36 mm	600 mm
HG5.400.SS	Ø 27-52 mm	400 mm
HG5.600.SS	Ø 27-52 mm	600 mm
HG6.400.SS	Ø 45-70 mm	400 mm
HG6.600.SS	Ø 45-70 mm	600 mm
HG7.400.SS	Ø 72-110 mm	400 mm
HG7.600.SS	Ø 72-110 mm	600 mm



### **DERC** Hose Whip Checks



95

SPECIFICATIONS		
Part No.	Description	
WR1	Whip Check 3 mm Model A	
WR2	Whip Check 6 mm Model B1/2"	
WR3	Whip Check 24" Red Dog	
GS4-950	Whip Check 4 mm with Kevlar and Polyester	
GS6-1000	Whip Check 6 mm with Kevlar and Polyester	





# DERC Warning Sign Water Jetting



**Safety first!** This warning sign is ideal to secure your job site. The sign is easy to fold out and the spring mechanism prevents collapsing unintentionally.

A weather-resistant galvanized steel frame ensures high stability. The folded sign is easy to store in its supplied protective cover. The edge length of this warning sign is 70 cm.





### **FEATURES**

- Weather-resistant signal covering made of robust plastic fabric
- High visibility
- Sturdy tripod, fully galvanized steel
- High level of stability thanks to specially shaped feet
- Easy to store and carry

### **APPLICATION**

• Securing job site when water jetting



### DERC SALOTECH

## **Guns & Foot Valves**



# THE PERFECT GUNS & FOOT VALVES FOR MANUAL HIGH PRESSURE CLEANING

DERC Salotech offers a wide range of High Pressure Jetting Guns, Foot Valves and accessories.

#### Made by DERC

We offer innovative solutions like the Derc Dump Gun (DDG) and DERC Electric Gun (WG). These guns have an ergonomic design, are light weight and provide more flexibility for the operator.



#### **FEATURES**

- Dump style or dry shot
- Up to 3000 bar
- Ergonomic design
- Light weight

### **APPLICATION**

• Manual water jet cleaning

#### **Tuf-Guns / USFG Foot Valves**

We also offer a full range of Tuf-Guns and USFG foot valves (dump style and dry shut).

### **DERC Dump Gun DDG**



This dump gun is designed and constructed for high pressure water jet cleaning in marine applications, general water jetting, surface preparation, hydro demolition, heat exchanger cleaning and tube bundle cleaning. When the dump gun is deactivated the water is dumped by the dump valve.



#### **Features**

- Light weight
- Custom made, lance length minimum 750 mm
- Nozzle holder, various available
- Hose connection, various available
- Ergonomic and adjustable shoulder stock
- With innovative anti vibration lance protector, which enables a better grip
- Available 1000 bar, 1400 bar or 2800 bar
- Two versions available; back or front hose connection inlet
- Easy and quick change of cartridge
- Rugged, reliable design

### **DERC Electric Gun WG**



This light weight gun for heavy duty cleaning jobs is surprisingly easy to handle. Its ergonomic design offers brand new manoeuvrability options, including rotating the handle 360°, and the choice to activate the trigger in horizontal and vertical position.



Safety features include the trigger lock (preventing non-intended activation) and the minimization of vibration, preventing fatigue and white finger syndrome. In fact, the hand-arm vibration level of the innovative gun is factor 4 less, compared to the best available traditional gun in the market.

#### **Features**

- 1500 or 3000 bar
- Light weight (3,5 kg)
- Ergonomic design
- Adjustable shoulder stock
- 360° Handle rotation
- Ergo trigger for easy horizontal and vertical handling
- Trigger lock to prevent "non-intended" jetting
- Anti-vibrational design prevents fatigue and white finger syndrome
- Lance protector allows better grip and prevents touching hot lance



### **Tuf-Gun Dry Shut HP Gun**



The Dry Shut type Tuf-Gun has no dump valve. This type of gun is used when remote dumping is required, to keep discharge water in the blasting area to a minimum. The high pressure system requires the use of an unloader valve, so the Tuf-Gun can never be unwanted pressurized.



TUF-GUN 3104515110		
Max. Pressure	1000 bar	
Connection	1/2" NPT	
Lance Type	3/8"	
Standard Lance Length	1200 mm	
Weight	5,5 kg	

TUF-GUN 3104520310			
Max. Pressure 1400 bar			
Connection	9/16" MP		
Lance Type 9/16"			
Standard Lance Length 1200 mm			
Weight	5,5 kg		

### Tuf-Gun Dump Style HP Gun



When activating the Tuf-Gun the dump valve of the gun will be closed and the system will be pressurized. By deactivation of the gun the water will be dumped by the dump valve of the Tuf-Gun gun. With this method the high pressure dump gun can never be unwanted pressurized. When the Tuf-Gun is deactivated, the water is dumped by the dump valve.



TUF-GUN 3102515110			
Max. Pressure 1000 bar			
Connection	1/2" NPT		
<b>Lance Type</b> 3/8" or 1/2"			
Standard Lance Length 800 mm			
Weight	5,5 kg		

TUF-GUN 3102540310		
Max. Pressure	2800 bar	
Connection	9/16" HP	
Lance Type	9/16"	
Standard Lance Length	1200 mm	

100

5,5 kg

TUF-GUN 3102520310			
Max. Pressure 1400 bar			
<b>Connection</b> 9/16" MP			
Lance Type 9/16"			
Standard Lance Length 1200 mm			
Weight 5,5 kg			

### **Tuf-Gun Zero Thrust**



The Tuf-Gun Zero Thrust is special designed and constructed for manual cleaning operations underwater or at topside applications where balance is critical. The diffuser tube assembly supplies an equal forward and backward thrust allowing the operator to be in balance.



TUF-GUN 3102515200				
Max. Pressure 1000 bar				
Connection	1/2" NPT			
Lance Type	1/2" NPT			
Standard Lance Length 1200 mm				
Weight 7,5 kg				

TUF-GUN 3102520300		
Max. Pressure	1400 bar	
Connection	9/16" MP	
Lance Type	9/16"	
Standard Lance Length	1200 mm	
Weight	7.5 kg	

### DDLT Air-Operated Dual Trigger Gun



The DDLT air-operated dual trigger high pressure gun is special designed for UHP water jetting (up to 2800 bar). This gun can be used in place of rotary air guns in most applications. The DDLT air-operated dual trigger high pressure gun works with the Tumble Box just like the Vulcan Stripper.

The DDLT air-operated dual trigger high pressure gun can be combined any Ultra High Pressure rotary nozzle for surface preparation and coating removal.



DDLT 3103600407			
Max. Pressure 2800 bar			
Connection	9/16" HP		
Lance Type	9/16"		
Standard Lance Length 900 mm			
Weight	7 kg		



### **USFG Dry Shut Foot Control**



The Dry Shut Foot Control is specifically designed and constructed for manual high pressure cleaning activities. The Dry Shut Foot Control is for example intended to clean heat exchangers in combination with a flexible hose.





MODEL 77700550					
Max. Pressure Max. Flow Connection Weight					
1000 bar	130 lpm	½" NPT	13,5 kg		
MODEL 77700590					
Max. Pressure Max. Flow Connection Weight					
1400 bar	130 lpm	9/16" MP	13,5 kg		

### **USFG Dump Style Foot Control**



When activating the Dump Style Foot Control the dump valve (spring return) of the Foot Control will be closed and the system will be pressurized. By deactivation of the Foot Control the water will be dumped by the dump valve. With this method the used hose or high pressure gun can never be unwanted pressurized.



MODEL 77700011				
Max. Pressure	Max. Flow	Connection	Weight	
800 bar	475 lpm	1" NPT	13,5 kg	
MODEL 3102210001				
Max. Pressure	Max. Flow	Connection	Weight	
1000 bar	130 lpm	1/2" NPT	13,5 kg	
MODEL 3102220001				
Max. Pressure	Max. Flow	Connection	Weight	
1400 bar	95 lpm	9/16" MP	13,5 kg	
MODEL 77700314				
Max. Pressure	Max. Flow	Connection	Weight	
2800 bar	50 lpm	9/16" HP	13,5 kg	

### **DERC** Multi Tool Valve UHP



The DERC Multi Tool Valve is especially designed and built to make it possible to work with two high pressure guns or foot valves with electric control on one high pressure unit, without influencing the pressure in the guns. The DERC Multi Tool Valve has a maximum working pressure of 2800 bar and can be attached to any high pressure unit. This requires external air pressure and 24VDC power.

The DERC Multi Tool Valve is mounted on a stainless steel frame, which can be installed next to or on the high pressure unit.

#### **Features**

- Very easy to operate, plug and play system
- To use in combination with every high pressure unit
- Suitable for one or two high pressure guns or foot valves with electric control
- Easy to transport with the 2 handles
- Easy maintenance



DUAL UHP OPERATION ON 1 PUMP

SPECIFICATIONS		
Part No.	D.MVT.2800EXI-7PS	
Max. Pressure	2800 bar	
Max. Flow	52 lpm (26 l per consumer)	
Connection Inlet Inlet 9/16" HP (M30x2 or 1 1/8" UNF in combination with M14 of 9/16" LH) or M combination with M18x1.5 LH		
<b>Connection Outlet</b> 2 x 9/16", 2 x 3/8" HP out for 5 mm UHP hose		
Input Voltage	24VDC	
Input Air	7 bar	
Signal Out	2 x 7 Pin Connector Steel 2 channel intrinsic safe EXI - for consumers*	
Signal In	1 x 7 Pin Connector Steel 2 channel intrinsic safe EXI - unit pressure on/off*	

<sup>\*</sup> Other connectors available on request

102



### **DERC** Insert Nozzles



### Insert Nozzles Up To 1500 Bar

DERC high-pressure waterjetting insert nozzles are an essential tool used in various industries for effective and efficient industrial cleaning applications. We offer a complete range made of high-quality hardened stainless steel, with a maximum pressure of up to 1500 bar, providing a durable and versatile solution.



SPECIFICATIONS				
Model	Thread	Length	Available Diameters	Part No.
DI 18	1/8" NPT	13 mm	Ø 0.50 - Ø 3.40	DI 18-xxx
DI 14	1/4" NPT	29 mm	Ø 0.50 - Ø 5.00	DI 14-xxx
DSI 14	1/4" NPT	17 mm	Ø 0.50 - Ø 4.20	DSI 14-xxx

### **DERC RN Nozzle**



### RotoCar Cleaning Nozzle Up To 1500 Bar

The RN-nozzle is specially designed for cleaning pipe systems with our Rotocar Cleaning System with a maximum working pressure of 1500 or 3000 bar. The nozzle can be specially configured for your operating condition per order. The nozzle is suitable for the cleaning of clogged pipes. Our special stages pyramid design enhances the effectiveness of your impact.



SPECIFICATIONS						
Connection	Thread	Orifices	Length	Diameter	Part No.	
M24x1.5	Male	3xØ1.7 mm	53 mm	Ø 32 mm	RN.029.31.xxx	
M22x1.5	Female	2xT4	74 mm	Ø 45 mm	RN145.2T4.14F	
M22x1.5	Female	4xT4	93 mm	Ø 45 mm	RN145.4T4.14F	
M22x1.5	Female	20xT4	108 mm	Ø 69 mm	RN169.20T4.14F	

### **DERC** Nozzle Drivers



### Up To 1500 Bar

The DERC range of Nozzle Drivers, also called pusher units, can be used behind every nozzle or even between hoses to give extra thrust. The DERC Nozzle Driver range goes standard up to 1500 bar/ 22K. Nozzle Drivers are a stock item with a short delivery time.



SPECIFICATIONS					
Connection D1	Connection D2	Diameter	No. of jets / Ø jets	Part No.	
M7x1 M	M7x1F	Ø 10 mm	2 x Ø 0.8 mm	ND.10.07.02	
M7x1 M	M7x1F	Ø 10 mm	3 x Ø 0.8 mm	ND.10.07.03	
M7x1 M	M7x1F	Ø 10 mm	4 x Ø 0.8 mm	ND.10.07.04	
1/8" BSP M	1/8" BSP F	Ø 10 mm	2 x Ø 0.8 mm	ND.12.18.02	
1/8" BSP M	1/8" BSP F	Ø 12 mm	3 x Ø 0.8 mm	ND.12.18.03	
1/8" BSP M	1/8" BSP F	Ø 12 mm	4 x Ø 0.8 mm	ND.12.18.04	
1/4" BSP M	1/4" BSP F	Ø 16 mm	2 x Ø 0.8 mm	ND.16.14.02	
1/4" BSP M	1/4" BSP F	Ø 16 mm	3 x Ø 0.8 mm	ND.16.14.03	
1/4" BSP M	1/4" BSP F	Ø 16 mm	4 x Ø 0.8 mm	ND.16.14.04	
1/4" BSP M	1/4" BSP F	Ø 22 mm	2 x Ø 0.9 mm	ND.22.14.02	
1/4" BSP M	1/4" BSP F	Ø 22 mm	3 x Ø 0.8 mm	ND.22.14.03	
M24x1.5 M	M24x1.5 F	Ø 30 mm	2 x Ø 1.0 mm	ND.30.24.02	
M24x1.5 M	M24x1.5 F	Ø 30 mm	3 x Ø 1.2 mm	ND.30.24.03	
M24x1.5 M	M24x1.5 F	Ø 30 mm	4 x Ø 1.0 mm	ND.30.24.04	
M22x1.5 M	1/4" BSP F	Ø 31 mm	2 x Ø 0.8 mm	ND.31.03.14	
M22x1.5 M	M24x1.5 M	Ø 31 mm	3 x Ø 1.0 mm	ND.31.03.24	
M22x1.5 M	1/4" BSP F	Ø 31 mm	4 x Ø 0.8 mm	ND.31.03.14	
M36x2 M	M36x2 M	Ø 45 mm	3 x Ø M6	ND.45.03.36	



### **Insert Fan Jet Nozzle 602**



### Model 602, Up To 750 Bar / 10K

The Insert Flat Fan Jet Nozzle is designed from hard and stainless steel. The flat fan gives you a high effective result. Insert Flat Fan Nozzle Model 602 is standard available from diameter 0,80 mm till 2,70 mm, other diameters are on request available.



### **SPECIFICATIONS**

Part No.	Diameter	Length	Angle	Thread
602.xxx	From Ø 0,80 mm till 2,70 mm	22 mm	From 15° till 60°	1/4" NPTM

### **Insert Round Jet Nozzle 546**



### Model 546, Up To 750 Bar / 10K

The Insert Round Jet Nozzle model 546 is designed from hard and stainless steel. It is standard available from 0,80 diameter till 2,10 mm diameter. Other diameters are on request available.



### **SPECIFICATIONS**

Part No.	Diameter	Length	Angle	Thread
546.xxx	From Ø 0,80 mm till 2,10 mm	22 mm	-	1/4" NPT M

### Fan Jet Nozzle 08 & 019



### Model 08 & 019, Up To 2000 Bar

The Fan Jet Nozzle Model 08 and 019 are made from hard and stainless steel. The strong fan gives you a high effective result. The Fan Jet Nozzle Model 08 and 19 are standard available from 0,25 diameter till 5,0 mm diameter, other diameters are on request available. The nozzle is used for a lot of jetting gun applications.





### **FAN JET NOZZLE MODEL 08**

Part No.	Diameter	LxØD/Ød (mm)	Angle
08.xxx	From Ø 0,25 mm till 5,00 mm	20x14/8	From 10 till 45°

### **FAN JET NOZZLE MODEL 19**

Part No.	Diameter	LxØD/Ød (mm)	Angle
19.xxx	From Ø 0,25 mm till 5,00 mm	20x12/8	From 15 till 45°

ADAPTOR 19 -> 08		O-RING BACK	O-RING BACK UP RING		
Part No.	Special Tool	Part No.	Description		
FSP.04.01	AD.04.01	OR.04.19	O-ring model 4/19		
		OR.01.08	O-ring model 1/8		
		BA.01.08	B-ring Type 1/8		



### Round Jet Nozzle 01 & 04



### Model 01 & 04, Up To 2000 bar / 29K

Made from hard and stainless steel, the long and sharp jet gives you a high effective result. Standard available from 0,40 diameter till 5,0 mm diameter, other diameters are on request available. This nozzle is also known as: Pencil jet, Hammelmann type A, Drop in nozzle, Uraca model Type P.



### **STANDARD ROUND JET NOZZLE MODEL 01**

Part No.	Diameter	LxØD/Ød (mm)
01.xxx	From Ø 0,40 mm till 5,00 mm	24x14/8

### **STANDARD ROUND JET NOZZLE MODEL 04**

Part No.	Diameter	LxØD/Ød (mm)
04.xxx	From Ø 0,40 mm till 5,00 mm	24x12/8

ADAPTOR 04 -> 01		O-RING BACK	O-RING BACK UP RING		
Part No.	Special Tool	Part No.	Description		
AD.04.01	FSP.04.01	OR.04.19	O-ring model 4/19		
		OR.01.08	O-ring model 1/8		
		BA.01.08	B-ring Type 1/8		

### Fan Jet Nozzle F965



Fanjet nozzle used for paper mill felt cleaning application. Used in combination with nozzle retainer M10 and Metso type manifold, see DERC Nozzle Holder for Paper Mill Applications (see page 114).



### **SPECIFICATIONS**

Part No.	Diameter	LxØD/Ød (mm)	Angle	
F965.xxx.xx	From 0.20 till 0.70 mm	21.7x5/8	15°/30°	

### **Nozzle Inserts Metric**



#### Up To 3000 bar / 43K

The Nozzle Insert Metric is designed from hardened and stainless steel. The constant key quality gives you a high power and focused water jet.



SPECIFICATIONS					
Part No.	Thread	Туре	Max. Pressure	Application	
400.114.xxx	M4	Fan Jet Nozzle	3000 bar - 43K	Papermill industry	
400.115.xxx	M4	RJ Nozzle	3000 bar - 43K		
400.116.xxx	M6	RJ Nozzle	1500 bar - 22K		
400.117.xxx	M3	RJ Nozzle	3000 bar - 43K	Special nozzle	

### **Ceramic Nozzles**



### Up To 3000 bar

The continuous shape of the ceramic insert produces a very high efficiency and an unbeatable impactfull jet. This nozzles have also a very good performance in the field of runway rubber removal, road marking removal and road surface retexturing.





SPECIFICATIONS		
Part No.	Connection	Max. Pressure
Ceramic Nozzle 909-CER	Insert	3000 bar
Ceramic Nozzle 916-CER	Insert	3000 bar
Ceramic Nozzle 950-CER	Insert	3000 bar
Ceramic Nozzle 952-CER	Insert	3000 bar
Ceramic Nozzle 965-CER	M10	3000 bar
Ceramic Nozzle 972-CER	3/8"-24 UNF	3000 bar



### **Sapphire Nozzles**



The extensive sapphire product range offers the right type of nozzle for most customer-specific system on the market. All sapphires are checked for scratches, cracks and flowrate. Through the guide sleeve we achieve an optimal water flow to the sapphire and the stone holder reduces the through hole, and serves the safety if a sapphire shatters.





SPECIFICATIONS			
Part No.	Connection	Max. Pressure	
Sapphire Nozzle 030	M3	1000 bar	
Sapphire Nozzle 040	M4	1000 bar	
Sapphire Nozzle 046	M4	3000 bar	
Sapphire Nozzle 060	M6	1000 bar	
Sapphire Nozzle 065	M6	3000 bar	
Sapphire Nozzle 080	M8	1000 bar	
Sapphire Nozzle 082	M8	2000 bar	
Sapphire Nozzle 165	M6	1000 / 2500 bar	

### **Sapphire Nozzle 270**



SPECIFICATIONS			
Part No.	Connection	Max. Pressure	
Sapphire Nozzle 270	Insert	4000 bar	





### **Sapphire Nozzle 916**



### **SPECIFICATIONS**

Part No. Connection Max. Pressure

3000 bar Sapphire Nozzle 916 Insert





### **Sapphire Nozzle 950**



### **SPECIFICATIONS**

Part No.	Connection	Max. Pressure
C	Lead	20001

Sapphire Nozzle 950 Insert 3000 bar





### **Sapphire Nozzle 952**



### **SPECIFICATIONS**

Part No.	Connection	Max. Pressure

Sapphire Nozzle 952 Insert 3000 bar





### **Sapphire Nozzle 964**



### **SPECIFICATIONS**

Part No.	Connection	Max. Pressure
Sapphire Nozzle 916	M10	3000 bar







### Sapphire Nozzle 965



### SPECIFICATIONS

Part No. Connection Max. Pressure

Sapphire Nozzle 965 M10





### **Sapphire Nozzle 972**



SPECIFICATIONS		
Part No.	Connection	Max. Pressure

Sapphire Nozzle 972 3/8

3/8" - 24 UNF 3000 bar

3000 bar





### **Sapphire Nozzle 976**



### **SPECIFICATIONS**

Part No. Connection Max. Pressure

Sapphire Nozzle 976 7/16" - 20 3000 bar





### **Round Jet Nozzle 226**



#### Model 226, Up To 1000 bar / 15K

The Round Jet Nozzle Model 226 is made from hard and stainless steel. The round jet gives you a high effective result. The Round Jet Nozzle Model 226 is standard available from 0,8 mm diameter till 5 mm diameter, other diameters are on request available. This nozzle is also known as: high speed nozzle, Bunddüse, Hammelmann Type L.





### **SPECIFICATIONS**

Part No.	Diameter	LxØD/Ød (mm)
226.xxx	From Ø 0,80 mm till 5 mm	28x17/12,5

### **DERC** Round Jet Nozzle HSN



### Model HSN, Up To 1000 bar / 15K

The Round Jet Nozzle Model HSN is made from hard and stainless steel. The round jet produces a focused water jet combined with a large max. flow. It is a perfect match for tank cleaning heads. The Round Jet Nozzle Model HSN is standard available from 1,4 mm diameter till 4,4 mm diameter, other diameters are on request available. This nozzle is also known as: high speed nozzle or Bunddüse.



#### **SPECIFICATIONS**

Part No.	Diameter	LxØD/Ød (mm)
HSN.xxx	From Ø 1,4 mm till 4.4 mm	26x17/9



# **DERC** Nozzle Holder for Paper Mill Applications



### FOR PAPER MILL SUCTION ROLL FELT CLEANING

#### **Unrivaled Cleaning Precision**

Experience the difference of advanced engineering with our specialized cleaning manifolds. Crafted with attention to detail, these manifolds feature a uniquely designed radius, perfectly aligned to the roll's surface. This innovative configuration ensures the most effective and thorough cleaning results achievable.

#### **Tailored Nozzle Holder Design**

Our nozzle holder is crafted to accommodate the demands of paper mill suction roll maintenance. Designed to hold 5x M10 model P965 (round-jet) or F965 (fan-jet) nozzles, this holder streamlines the cleaning process while maximizing efficiency.

### **Effortless Connectivity**

With a seamless M24 Quick Lock connection, our nozzle holder ensures swift and hassle-free assembly. This facilitates quick maintenance turnaround times, minimizing downtime and optimizing overall productivity.

#### **FEATURES**

- Easy assembly
- Stainless Steel
- Holds 5x P965 or F965 nozzles
- Nozzles perfectly alligned to paper mill suction roll's surface



### Paper Mill Machine Nozzles PMN



The PMN nozzles for the paper industry are characterized by their very robust design and the self-produced synthetic ruby nozzle stone. A long service lifetime and a constant jet quality are guaranteed.



### Edge Trim Nozzles RSD



These high-performance RSD nozzles for paper cutting are characterised by their long lifetime, efficiency and quality. The extensive product range offers the right type of nozzle for most paper cutting systems. The ruby inserts used especially for this ensure that the nozzles enjoy a long service life and a constant jet performance.



### Paper Mill MSD Nozzles



Multi-Insert nozzle holder for paper mill production. Used during paper production for felt cleaning application. Connection M18 male with O-ring sealing, 2-9 long sharp jets and sapphire inserts for effective cleaning.







SPECIFICATIONS			
Туре	Diameter	Part No.	
6740 MSD-2	Ø 0.20, 0.25, 0.30	6740 MSD-2.020-6740 MSD-2.030	
6740 MSD-3	Ø 0.20, 0.25, 0.30	6740 MSD-3.020-6740 MSD-3.030	
6740 MSD-4	Ø 0.20, 0.25, 0.30	6740 MSD-4.020-6740 MSD-4.030	
6740 MSD-6	Ø 0.20, 0.25, 0.30	6740 MSD-6.020-6740 MSD-6.030	
6740 MSD-9	Ø 0.125, 0.15, 0.175, 0.20	6740 MSD-9.0125-6740 MSD-9.020	



# **DERC** Adapters, Manifolds & Nozzle Holders

### **DERC** Adapters, Manifolds & Nozzle Holders




### DESIGNED & MANUFACTURED TO YOUR SPECIFICATIONS

#### **Engineering**

116

DERC Salotech offers a full range of adapters, manifolds and nozzle holders that can be custom made to your specifications. Our engineers will assist you in the development, design and manufacturing of the most effective, innovative and safe cleaning solutions for your organisation or your specific industrial cleaning objective.



### Manufacturing

In our factory you will find a fine selection of craftsmen and specialists with a deep knowledge of water jetting technology. This team - guided by our engineers and engineering department - has the insights, competences and aspiration to guarantee a technical perfect product for you.



#### **Stock Items**

Besides custom made solutions, we also have a large stock of standard products that can be shipped with short delivery times.



**REDUCING ADAPTERS** 



**DOUBLE FITTINGS** 



**SOCKETS** 





**MANIFOLDS** 

**NOZZLE HOLDERS & CAPS** 

118



### **DERC** Reducing Adapters



The tables below shows just a sample of the reducing adapters we provide. It consists of our standard product range that we can deliver quickly from stock. But there are endless possibilities with thread type and size that can be engineered and manufatured in our factory.



ADAPTER MALE X MALE			
Thread 1	Thread 2	Max. Pressure	Part No.
M7x1	5/16" UNF	1000 bar	NI.07MV.516UM
M22x1.5	M24x1.5	1500 bar	NI.22M.24M
M22x1.5	M24x1.5 flat	1500 bar	NI.24M.24MV
M24x1.5	3/4" MP	1500 bar	NI.24M.M12M
M24x1.5	3/4" NPT	1000 bar	NI.24M.34NM
M24x1.5	M36x2	1500 bar	NI.24M.36M
M24x1.5	M36x2 flat	1500 bar	NI.24M.36MV

ADAPTER MALE X MALE				
Thread 1	Thread 2	Max. Pressure	Part No.	
1/8" BSP	1/4" BSP	1500 bar	NI.18M.14M	
1/4" BSP	M24x1.5	1500 bar	NI.14M.24M	
1/4" BSP	3/8" BSP flat	1500 bar	NI.14M.38MV	
1/4" BSP	13/16 UNF	1500 bar	NI.14M.M9M	
3/8" BSP	1/2" NPT	1000 bar	NI.38M.12NM	
3/8" BSP	M24x1.5	1250 bar	NI.38M.24M	
3/8" BSP flat	M24x1.5	1250 bar	NI.38MV.24M	
1/2" BSP	M22x1.5	1500 bar	NI.12M.22M	
1/2" BSP	M24x1.5	1500 bar	NI.12M.24M	

ADAPTER MALE X MALE						
Thread 1 Thread 2 Max. Pressure Part No.						
9/16" UNF	M24x1.5	1500 bar	NI.M9M.24M			

### **DERC** Reducing Adapters



ADAPTER MALE	Y MALE					
Thread 1 Thread 2 Max. Pressure Part No.						
1/4" NPT	1/4" BSP	1000 bar	NI.14NM.14M			
3/8" NPT	M24x1.5	1000 bar	NI.38NM.24M			
1/2" NPT	1/2" BSP	1000 bar	NI.12NM.12M			
1/2" NPT	M24x1.5	1000 bar	NI.12NM.24M			
3/4" NPT	M36x2	1000 bar	NI.34NM.36M			
ADAPTER MALE	X FEMALE					
Thread 1	Thread 2	Max. Pressure	Part No.			
M24x1.5 M	3/4" NPT F	1000 bar	NI.24M.34NF			
ADAPTER MALE X FEMALE						
Thread 1	Thread 2	Max. Pressure	Part No.			
1/8" BSP F	M24x1.5 M	1500 bar	NI.18FV.24M			
1/4" BSP F	3/8" NPT M	1000 bar	NI.14FV.38NM			
1/4" BSP M	3/8" BSP F	1500 bar	NI.14MV.38F			
1/4" BSP F	M24x1.5 M	1500 bar	NI.14FV.24M			
1/4" BSP F	3/8" BSP M flat	1500 bar	NI.14FV.38MV			
3/8" BSP F	M24x1.5 M	1500 bar	NI.38FV.24M			
1/2" BSP F	M24x1.5 M	1500 bar	NI.12FV.24M			
ADAPTER MALE	X FEMALE					
Thread 1	Thread 2	Max. Pressure	Part No.			
1/16" NPT F	M7x1 M	1000 bar	NI.116NF.07M			
1/4" NPT M	1/4" BSP F	1000 bar	NI.14NM.14FV			
1/2" NPT F	M24x1.5 M	1000 bar	NI.12NF.24M			
3/4" NPT F	M36x2 M	1000 bar	NI.34NF.36M			
ADAPTER FEMA	LE X FEMALE					

Max. Pressure

1000 bar

1000 bar

Part No.

NI.14NF.14F

NI.14NF.38F

119

CALL US +31 186 - 62 14 84

Thread 1

1/4" NPT

1/4" NPT

Thread 2

1/4" BSP

3/8" BSP



### **DERC** Double Fittings



The tables below shows just a sample of the double fitting adapters we provide. It consists of our standard product range that we can deliver quickly from stock. But there are endless possibilities with thread type and size that can be engineered and manufatured in our factory.



DOUBLE FITTINGS BSP CONICAL				
Connection	Max. Pressure	Part No.		
1/4"	1500 bar	NI.14M.14M		
3/8" 1500 bar		NI.38M.38M		
1/2"	1500 bar	NI.12M.12M		

DOUBLE FILLINGS BSP FLAT FACE				
Connection	Max. Pressure	Part No.		
1/4"	1500 bar	NI.14MV.14MV		
3/8"	1500 bar	NI.38MV.38MV		

DOUBLE FITTINGS METRIC				
Connection	Max. Pressure	Part No.		
M7x1	1500 bar	NI.07M.07M		
M22x1.5	1500 bar	NI.22M.22M		
M24x1.5	1500 bar	NI.24M.24M		
M36x2	1500 bar	NI.36M.36M		

DOUBLE FITTINGS NPT					
Connection	Max. Pressure	Part No.			
1/4"	1000 bar	NI.14NM.14NM			
1/2"	1000 bar	NI.12NM.12NM			
DOUBLE FITTINGS U	NF				
Connection	Max. Pressure	Part No.			
5/16" - 24 UNF	1000 bar	NI.516UM.516UM			

### **DERC** Manifolds



### High pressure fittings

For all kind of applications DERC Salotech manufactures multi port manifolds, y-pieces and custom made solutions. The table below shows just a sample of what we can provide. It consists of our standard product range that we can deliver quickly from stock. But there are endless possibilities with thread type and size that can be produced in our factory.



OPTIONAL ARMS AND HEADS					
Connection	Size	Max. Pressure	Part No.		
3x 3/4" NPT F (Y)	Ø 110 x 44 mm	1000 bar	MA.343NF		
3x 9/16" MP F (Y)	Ø 110 x 44 mm	1500 bar	MA.3916MP		
3x 1/2" BSP F (Y)	Ø 80 x 35 mm	1000 bar	MA.123F		
1x M36x2 F-3x 1/4" NPT F	Ø 55 x 70 mm	1000 bar	MA.3-TLE36F		



### **DERC Sockets**



The tables below shows just a sample of the sockets we can provide. It consists of our standard product range that we can deliver quickly from stock. But there are endless possibilities with thread type and size that can be engineered and manufatured in our factory.



SOCKETS BSP FLAT FACE				
Connection	Max. Pressure	Part No.		
1/4"	1500 bar	NI.14FV.14FV		
3/8"	1250 bar	NI.38FV.38FV		
1/2"	1500 bar	NI.12FV.12FV		

SOCKETS METRIC FLAT FACE			
Connection	Max. Pressure	Part No.	
M7x1	1500 bar	NI.M7FV.M7FV	
M24X1.5	1500 bar	NI.24FV.24FV	

SOCKETS NPT			
Connection	Max. Pressure	Part No.	
1/4"	1000 bar	NI.14NF.14NF	

### **DERC** Nozzle Holders & Caps



DERC Salotech manufactures a wide range of stainless steel nozzle holders and caps with a working pressure up to 2000 bar. The tables below shows just a sample of what we can provide. It consists of our standard product range that we can deliver quickly from stock, both nozzle holders for nozzles and all kind of tank cleaning heads. There are endless possibilities with thread type and size that can be produced in our factory.



NOZZLE HOLDERS					
Nozzle Type	Thread	Length	Spanner	Max. Pressure	Part No.
T4/T19 (3/8" BSP M)	3/8" BSP F	55 mm	23 mm	1200 bar	4050.6.38F
T4/T19 (3/8" BSP M)	3/8" NPT F	60 mm	27 mm	1000 bar	4050.6.38NF
T4/T19 (3/8" BSP M)	13/16" UNF	55 mm	27 mm	1500 bar	4050.6.916UF
T4/T19 (3/8" BSP M)	9/16" - 18 UNF	50 mm	27 mm	1500 bar	4050.6.916Y
T1/T8 (1/2" BSP M)	3/8" NPT F	50 mm	27 mm	1000 bar	4050.8.38NF
T1/T8 (1/2" BSP M)	9/16" UNF-18	50 mm	24 mm	2000 bar	4050.8.916Y
T1/T8 (1/2" BSP M)	M14x1.5 F	50 mm	24 mm	2000 bar	4050.8.M14Y

NOZZLE CAPS					
Nozzle Type	Thread	Length	Spanner	Max. Pressure	Part No.
T4/T19	3/8" BSP F	29 mm	27 mm	1500 bar	4050.2.005
T1/T8	1/2" BSP F	34 mm	28 mm	2000 bar	4050.2.007
T226	1/2" BSP F	62 mm	32 mm	1250 bar	W3508
T4/T19	M24x1.5	40 mm	32 mm	1200 bar	W4149





# **DERC** Rupture Disc Holder



### SAFETY DEVICE FOR HIGH PRESSURE PUMP SYSTEMS

The DERC Rupture Disc Holder is a safety device for high pressure units and systems. When the pressure gets higher than the rupture disc permits, the rupture disc will break out, which results in an immediate system pressure drop. Therefore the installation can never exceed the maximum pressure of the mounted bursting disc. The DERC Rupture Disc Holder holds a rupture disc.

### **FEATURES**

- Quick delivery time
- 1000, 1500 and 3000 bar
- 3 types of connections
- Made of stainless steel
- Also a portable version

_		
SD	ECIFIC <i>I</i>	ATIONS
JE		1110113

124

Part No.	Max. Pressure	Connection	Disc Type
D.RDH.1000	1000 bar	1/2" NPT	1/2"
D.RDH.1500	1500 bar	13/16" - 16 UNF (9/16" MP)	1/4"
D.RDH.3000	3000 bar	1 1/8" - 12 UNF (9/16" HP)	1/4"





### **Rupture Disc**



A Rupture Disc Holder holds a rupture disc. When the system pressure exceeds the maximum pressure of the rupture disc, it will break the rupture disc. As a result the water can now drain through the drain holes at the top of the Rupture Disc Holder.



RUPTURE DISC TYPE 1/2 STD			
Part No.	Max. Pressure (bar)	Max. Pressure (kpsi)	
31.32001.010	70	1.0	
31.32001.015	100	1.5	
31.32001.020	140	2.0	
31.32001.027	185	2.7	
31.32001.030	205	3.0	
31.32001.031	215	3.1	
31.32001.035	240	3.5	
31.32001.039	270	3.95	
31.32001.045	310	4.5	
31.32001.050	345	5.0	
31.32001.055	380	5.5	
31.32001.060	420	6.0	
31.32001.065	450	6.5	
31.32001.070	490	7.0	
31.32001.075	525	7.5	
31.32001.080	560	8.0	
31.32001.088	616	8.8	
31.32001.100	690	10.0	
31.32001.105	735	10.5	
31.32001.117	820	11.7	
31.32001.120	830	12.0	
31.32001.125	875	12.5	
31.32001.130	900	13.0	
31.32001.135	930	13.5	
31.32001.140	965	14.0	
31.32001.148	1020	14.8	
31.32001.150	1035	15.0	
31.32001.152	1050	15.2	
31.32001.160	1120	16.0	
31.32001.165	1155	16.5	
31.32001.170	1182	17.0	
31.32001.180	1250	18.0	
31.32001.188	1316	18.8	
31.32001.200	1400	20.0	
31.32001.225	1550	22.5	

RUPTURE DISC TYPE 1/4 A/S			
Part No.	Max. Pressure (bar)	Max. Pressure (kpsi)	
31.33023.080	550	8.0	
31.33023.125	860	12.5	
31.33023.150	1035	15.0	
31.33023.165	1150	16.5	
31.33023.170	1200	17.0	
31.33023.175	1225	17.5	
31.33023.180	1250	18.0	
31.33023.200	1400	20.0	
31.33023.220	1500	22.0	
31.33023.223	1535	22.3	
31.33023.225	1550	22.5	
31.33023.230	1585	23.0	
31.33023.240	1680	24.0	
31.33023.250	1725	25.0	
31.33023.270	1860	27.0	
31.33023.280	1930	28.0	
31.33023.300	2070	30.0	
31.33023.325	2240	32.5	
31.33023.330	2275	33.0	
31.33023.340	2345	34.0	
31.33023.345	2415	34.5	
31.33023.350	2450	35.0	
31.33023.370	2550	37.0	
31.33023.385	2695	38.5	
31.33023.438	3020	43.8	
31.33023.450	3100	45.0	
31.33023.470	3240	47.0	
31.33023.509	3500	50.9	
31.33023.520	3585	52.0	
31.33023.620	4300	62.0	

-	RUPTURE DISC TYPE 1 IN			
	Part No.	Max. Pressure (bar)	Max. Pressure (kpsi)	
_	31.77044.001	69	1.0	

CALL US +31 186 - 62 14 84

31.32001.250

1725

25.0

<sup>\*</sup>Other connections and pressures are available on request.



### **DERC** Lances




DERC Salotech offers a wide range of stainless steel (ultra) high pressure tubing till 4000 bar. We supply a wide range of tube sizes, ranging from from 1/4" (6.35 mm) up to 1" (33.4 mm). We cut and thread the lances to suit your application. Lengths available till 35 ft. (10.6 m), longer on request. All lances are delivered with certificates.



### WE HAVE A STOCK OF THE FOLLOWING TUBE SIZES:

Connection	Max. Pressure	Outside Diameter	Inside Diameter
1/4" UHP	4000 bar	6,35 mm	2,26 mm
3/8" UHP	4000 bar	9,53 mm	3,2 mm
9/16" UHP	4000 bar	14,3 mm	4,75 mm
3/8" MP	1500 bar	9,53 mm	5,15 mm
9/16" MP	1500 bar	14,3 mm	7,92 mm
3/4" MP	1500 bar	19,05 mm	11,1 mm
5/16"	1500 bar	7,9 mm	4,6 mm
1/8"	1000 bar	10,3 mm	5,58 mm
1/4"	1500 bar	13,7 mm	7,92 mm
3/8"	1500 bar	16,7 mm	10,75 mm
1/2"	1000 bar	21,34 mm	11,78 mm
3/4"	1000 bar	26,67 mm	15,55 mm
1"	1000 bar	33,4 mm	24,3 mm
24x7	1500 bar	24 mm	10 mm



126

### **DERC** Stingers



Stingers are stainless steel high pressure ridged lances which are used when flex lancing. They are used to prevent boomeranging and to prevent nozzle and hose damage by whipping of the hose exiting the tube. For safe and easy flex lancing we manufacture all necessary stingers.



### STINGERS UP TO 1000 BAR

Connection	Diameter	Part No.	
5/16" UNF	ø 10 mm	VL516MFxxxx	
1/16" NPT	ø 10.5mm	VL116NMFxxxx	
1/8" NPT	ø 12 mm	VL18NMFxxxx	
1/4" NPT	ø 16 mm	VL14NMFxxxx	
1/2" NPT	Hexagon 27 mm	VL12NMFxxxx	
M24x1.5	Hexagon 30 mm	VL24MFxxxx	
3/4" NPT	ø 40 mm	VL34NMFxxxx	

### **STINGERS UP TO 1500 BAR**

Connection	Diameter	Part No.
M7x1	ø 9.4 mm	ST07MFxxxx
1/4" UNF LH	ø 9.5 mm	ST14UMFxxxx
1/8" BSP	ø 12 mm	ST18MFxxxx
3/8" UNF LH	ø 13 mm	ST38UMFxxxx
1/4" BSP	ø 16 mm	ST14MFxxxx
9/16" UNF LH	ø 18 mm	ST916UMFxxxx
M24x1.5	Hexagon 30 mm	ST24MFxxxx
M36x2	Hexagon 46 mm	ST36MFxxxx

		OO BAR

Connection	Diameter	Part No.
3/8" UNF	ø 12.7 mm	ST38UHMFxxxx
9/16" UNF	ø 19 mm	ST916UHMFxxxx
M14x1.5	ø 19 mm	STM14UHMFxxxx



### **DERC** Short 90° Elbows



The tables below shows just a sample of the short 90° elbows we provide. It consists of our standard product range that we can deliver quickly from stock. But there are endless possibilities with thread type and size that can be engineered and manufatured in our factory.





WE HAVE A STOCK OF THE FOLLOWING SHORT 90° ELBOWS:				
Angle	Thread	Size	Max. Pressure	Part No.
90°	1/2" BSP M/F	49x45x30 mm	1500 bar	360.1453
90°	M24x1.5 M/F	52x50x30 mm	1500 bar	360.1455
90°	M36x2 M/F	67x65x36 mm	1500 bar	360.1456
90°	1/2" NPT - M24x1.5	55x50x30 mm	1000 bar	360.1452
90°	9/16" MP - M24x1.5	55x50x30 mm	1500 bar	360.1457

## **Quick Connectors**



Built for durability and convenience, these connectors offer a quick and safe connection for your high pressure hoses up to 1000 bar.





QUICK CONNECTORS		
Plug	Max. Pressure	Part No.
3/8" NPT F	1000 bar	\$34-32504-001
1/2" BSP F	1000 bar	516001-BSPF
1/2" NPT F	1000 bar	516001
3/4" NPT F	800 bar	516054
1" NPT F	700 bar	516070

### **DERC Long Radius Elbows**



### 45° and 90° stainless steel long radius elbows

For high pressure water jetting installations and all other applications DERC Salotech manufactures a complete range of high pressure stainless steel elbows (up to 3000 bar). These elbows have less pressure loss due to the bended tubing and design.



ELBOW M24 SPECIFICATIONS					
Part No.	45° / 90°	Connection	Thread	Max. Pressure	
ELB.45.24M.24SW	45°	M/F	M24x1.5	1000 bar	
ELB.45.24SW.24SW	45°	F/F	M24x1.5	1000 bar	
ELB.90.24M.24M	90°	M/M	M24x1.5	1000 bar	
ELB.90.24SW.24SW	90°	F/F	M24x1.5	1000 bar	
FI B.90.24M.24SW	90°	M/F	M24x1.5	1000 bar	

ELBOW M36 SPECIFICATIONS				
Part No.	45°/90°	Connection	Thread	Max. Pressure
ELB.45.36SW.36SW	45°	F/F	M36x2	1500 bar
ELB.90.36M.36M	90°	M/M	M36x2	1500 bar
ELB.90.36SW.36SW	90°	F/F	M36x2	1500 bar
ELB.90.36M.36SW	90°	M/F	M36x2	1500 bar
ELB.45.36M.36SW	45°	M/F	M36x2	1500 bar

OTHER ELBOW S	OTHER ELBOW SPECIFICATIONS			
Part No.	45° / 90°	Connection	Thread	Max. Pressure
ELB.90.01NM.36SW	90°	M/F	1" NPT M36x2	800 bar
ELB.90.42M.42M	90°	M/M	M42x2	1000 bar
ELB.90.42SW.42SW	90°	F/F	M42x2	1000 bar
ELB.90.42M.42SW	90°	M/F	M42x2	1000 bar



### **Connectors & Cables**



### **Connecting Electricity**

DERC Salotech offers a wide range of 4 or 7 pin connectors (soldered or crimped), accessories and cables. See the tables below for the full range of products.



### STANDARD CONNECTORS, 7 PIN SOLDER CONNECTION

Description	Part No.
Connector 7 pin M steel	EL.01103
Connector 7 pin F steel	EL.01108
Chassis part 7 pin M steel	EL.01101
Chassis part 7 pin F steel	EL.01102

### STANDARD CONNECTORS, 7 PIN, CRIMP CONNECTION

Description	Part No.
Connector 7 pin M steel	EL.01103.001
Connector 7 pin F steel	EL.01108.001
Chassis part 7 pin M steel	EL.01101.001
Chassis part 7 pin F steel	EL.01102.001
Spare/replacement pin M	030-8586-000
Spare/replacement pin F	031-8555-110

### EXTRA ACCESSORIES FOR STANDARD CONNECTORS

Description	Part No.
Protection plug 7 pin	EL.01106
Protection plug 7 pin	EL.01107
Seal for Chassis part	EL.075-8515-0
Cable nut with pull release PG13 (incl. EL.116 336)	EL.100.2015
Cable nut with pull release PG11	EL.100.2007
Seal ring PG13 5-8 mm	EL.116.335
Seal ring PG13 5-13 mm	EL.116.336

### **SKINTOP BENDING CONNECTION**

Description	Part No.
Skin bending connection PG11	EL.530.15620
Skin bending connection PG13	EL.530.15630
Skin bending connection M20x1.5	EL.530.17630

### **OTHER CONNECTORS**

Description	Part No.
Connector 4 pin M steel	EL.401326
Connector 4 pin F steel	EL.401327
Connector 7 pin M plastic	EL.3104.001
Connector 7 pin F plastic	EL.3105.001
Chassis part 7 pin M plastic	EL.3106.001
Chassis part 7 pin F plastic	EL.3107.001
Connector 4 pin M plastic	EL.3108.001
Connector 4 pin F plastic	EL.3109.001
Chassis part 4 pin M plastic	EL.3110.001
Chassis part 4 pin F plastic	EL.3111.000
Connector 4 pin M steel crimp	EL.401326.001
Protection cap for EL.401326.001	EL.401326.002
Connector 4 pin F steel crimp	EL.401327.001
Protection cap for EL.401327.001	EL.401327.002

### **ELECTRICAL CABLE 7 WIRE**

	Description	Part No.	
	Electric cable 4 wire PUR 4 x 0.75	EL.082.1020	
	Electric cable 7 wire PUR 7 x 0.75	EL.70000	

### Emergency Stops, Remotes & Reels



### **Cutting Off Power in Case of Emergency**

DERC Salotech offers emergency stops and remote on/off switches to cut off power instantly. See the tables below for the available options.



### **REMOTE CONTROL**

Description	Part No.
Remote control On/Off + emergency switch and 7 pin M-F chassis part connectors, 2 channel	EL.2000.002
Remote control On/Off + Emergency switch with 3 m cable and 7 pin M steel connector, 2 channel	EL.6000.032

### **CABLE REEL**

Description	Part No.
Cable reel with 50 m cable, emergency switch and 7 pin M steel connector, 2 channel	EL.4000.502
Cable reel with 100 m cable, emergency switch and 7 pin M steel connector, 2 channel	EL.3000.102

### **EMERGENCY STOP**

Description	Part No.			
Emergency switch with 7/1 m cable and 7 pin M-F steel connectors, 2 channel	EL.5000.232			

### **DERC** Pre-Filter



### Protect your high pressure equipment

The DERC Pre-filter filters your suction water and protects your valuable high pressure equipment. A filtration of 800 to 30 microns is possible by the use of two various filter elements. The stainless steel filter elements are easy to clean.

PECI		

Single Pre Filter Ass.	FL.15000.AS	
Max. Pressure	10 bar	
Max. Capacity	max. 30 m3/h	
Connection	Storz nok 81	
Couplers for Duplex System (Set)	FL.15200.AS	




Inner Filter Element FL12001.xxx  $30/50/75/100/130/300/435~\mu m$ 

Outer Filter Element FL12002.xxx 75/100/130/200/300/435/800 μm

# **Sewer Cleaning Nozzles**

### **Sewer Cleaning Nozzles**



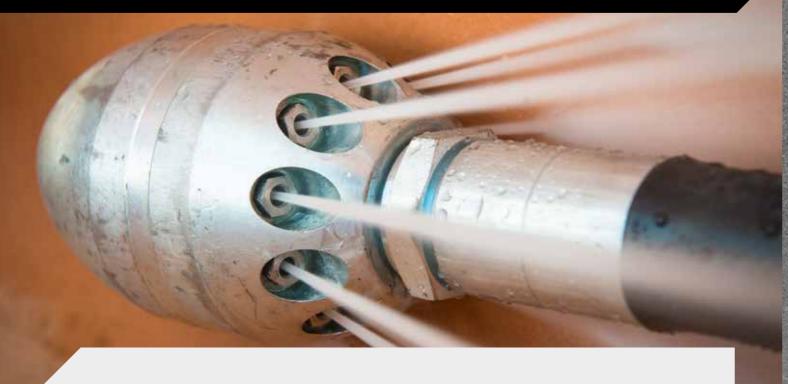

### FAST AND EFFECTIVE CLEANING OF SEWER PIPES

For sewer cleaning applications DERC Salotech offers a wide range of nozzles with interchangeable carbide, ceramic or steel inserts. All nozzles are made by hardened steel, some of them by hardened stainless steel.

### **Rotating & Vibration Action Nozzles**

For the removal of calcified obstructions or limestone sediments, we offer rotating & vibration action nozzles.

#### **Desanders Nozzles**

The main characteristics of the desanding nozzles are the high weight and the orientation of the jets towards the bottom of the pipe, so as to concentrate all the water flow of the pump in the thrust and simultaneous removal of mud, sand and sediment deposits. DERC Salotech recommends the use of rotary swivels to connect these heavy nozzles to the high pressure hoses. These nozzles are supplied with interchangeable ceramic or carbide (W) inserts. The latter ones are recommended with water recycling systems.

#### **FEATURES**

- Rugged stainless steel construction
- Easy adjustable rotation speed
- With sharp hard hitting jets
- Max. working pressure 400 bar

### **APPLICATIONS**

- General sewer cleaning
- Grease removal
- Root cutting



For the removal of roots, rust, limestone and unsuccessfull liners, we offer rotating nozzles with chains. Chain nozzles should always be used with chains and centralizer suitable for the pipe diame-

### **Nozzles for Cleaning Domestic Drains** (DN30-200)

The nozzles in this category satisfy the most ordinary cleaning needs in domestic and condominium pipelines, combining materials (stainless steel and not), weight, small dimensions and thrust jet inclinations. Normally these nozzles have 1/8", 1/4", 3/8", and 1/2" female threads but they are also available with male threads.









# **DERC** Sewer Razor

### **DERC** Sewer Razor







The DERC Sewer Razor is the first sewer tool on the market with an easy to adjust rotating speed, making it the most versatile tool available.

#### **Rotation Speed**

It's unique speed controlled swivel is supported by a rugged centralizer to withstand hard deposits. The speed of rotation is easy to set manually to create the right tool for each job.

#### **Jetting Heads**

134

The jetting head of the DERC Sewer Razor is equipped with one front jet offset for unplugging and four jets for cleaning and pulling. The DERC Sewer Razor can be outfitted with two different heads; one for a high capacity pump and one for a smaller pump. Other heads for descaling and custom made models are possible.

#### **FEATURES**

- Rugged stainless steel construction
- Easy adjustable rotation speed
- With sharp hard hitting jets
- Max. working pressure 400 bar

### **APPLICATIONS**

- General sewer cleaning
- Grease removal
- Root cutting
- Final finishing before camera inspection



#### **SPECIFICATIONS**

Max. Flow	Dimensions	Connection	Nozzles	Rotation Speed	Max. Pressure
380 lpm	Ø 125 x 213 mm	1" BSP female (other connections on request)	DSI 14 1/4"NPT with flow stabilizer	Adjustable up to 300 rpm	400 bar







JAN VAN DER HEIJDENSTRAAT 44 3261 LE OUD-BEIJERLAND THE NETHERLANDS

> DERCSALOTECH.NL +31 186 - 62 14 84

DERC SALOTECH DEALER INFORMATION: